

**cloudera**<sup>®</sup>

CDK 3.0.x Powered By  
Apache Kafka<sup>®</sup>

## **Important Notice**

© 2010-2021 Cloudera, Inc. All rights reserved.

Cloudera, the Cloudera logo, and any other product or service names or slogans contained in this document are trademarks of Cloudera and its suppliers or licensors, and may not be copied, imitated or used, in whole or in part, without the prior written permission of Cloudera or the applicable trademark holder. If this documentation includes code, including but not limited to, code examples, Cloudera makes this available to you under the terms of the Apache License, Version 2.0, including any required notices. A copy of the Apache License Version 2.0, including any notices, is included herein. A copy of the Apache License Version 2.0 can also be found here: <https://opensource.org/licenses/Apache-2.0>

Hadoop and the Hadoop elephant logo are trademarks of the Apache Software Foundation. All other trademarks, registered trademarks, product names and company names or logos mentioned in this document are the property of their respective owners. Reference to any products, services, processes or other information, by trade name, trademark, manufacturer, supplier or otherwise does not constitute or imply endorsement, sponsorship or recommendation thereof by us.

Complying with all applicable copyright laws is the responsibility of the user. Without limiting the rights under copyright, no part of this document may be reproduced, stored in or introduced into a retrieval system, or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), or for any purpose, without the express written permission of Cloudera.

Cloudera may have patents, patent applications, trademarks, copyrights, or other intellectual property rights covering subject matter in this document. Except as expressly provided in any written license agreement from Cloudera, the furnishing of this document does not give you any license to these patents, trademarks copyrights, or other intellectual property. For information about patents covering Cloudera products, see <http://tiny.cloudera.com/patents>.

The information in this document is subject to change without notice. Cloudera shall not be liable for any damages resulting from technical errors or omissions which may be present in this document, or from use of this document.

### **Cloudera, Inc.**

**395 Page Mill Road  
Palo Alto, CA 94306  
info@cloudera.com  
US: 1-888-789-1488  
Intl: 1-650-362-0488  
www.cloudera.com**

### **Release Information**

Version: CDK 3.0.x Powered By Apache Kafka®  
Date: July 20, 2021

# Table of Contents

<b>CDK Powered By Apache Kafka®</b> .....	<b>5</b>
Understanding Kafka Terminology.....	5
<b>CDK Powered By Apache Kafka® Release Notes</b> .....	<b>10</b>
What's New in CDK Powered By Apache Kafka?.....	10
CDK Powered By Apache Kafka Requirements and Supported Versions.....	12
<i>Supported CDH and Cloudera Manager Releases</i> .....	12
<i>Supported Operating Systems</i> .....	12
<i>Supported JDK Versions</i> .....	12
<i>Ports Used by Kafka</i> .....	12
Issues Fixed in CDK Powered By Apache Kafka.....	13
<i>Issues Fixed in CDK 3.0.0 Powered By Apache Kafka</i> .....	13
<i>Issues Fixed in CDK 2.2.0 Powered by Apache Kafka</i> .....	13
<i>Issues Fixed in CDK 2.1.2 Powered By Apache Kafka</i> .....	14
<i>Issues Fixed in CDK 2.1.1 Powered By Apache Kafka</i> .....	14
<i>Issues Fixed in CDK 2.1.0 Powered By Apache Kafka</i> .....	14
<i>Issues Fixed in CDK 2.0.2 Powered By Apache Kafka</i> .....	14
<i>Issues Fixed in CDK 2.0.1 Powered By Apache Kafka</i> .....	15
<i>Issues Fixed in CDK 2.0.0 Powered By Apache Kafka</i> .....	15
<i>Issues Fixed in CDK 1.4.0 Powered By Apache Kafka</i> .....	15
<i>Issues Fixed in CDK 1.3.2 Powered By Apache Kafka</i> .....	16
<i>Issues Fixed in CDK 1.3.1 Powered By Apache Kafka</i> .....	16
<i>Issues Fixed in CDK 1.3.0 Powered By Apache Kafka</i> .....	16
<i>Issues Fixed in CDK 1.2.0 Powered By Apache Kafka</i> .....	17
Known Issues in CDK Powered By Apache Kafka.....	17
CDK Powered By Apache Kafka Incompatible Changes and Limitations.....	23
<b>CDK Powered By Apache Kafka® Version and Packaging Information</b> .....	<b>24</b>
Examples of CDK Powered By Apache Kafka Versions.....	24
Cloudera Distribution of Apache Kafka Versions.....	24
Maven Artifacts for Kafka.....	26
<b>Installing, Migrating and Upgrading CDK Powered By Apache Kafka</b> .....	<b>31</b>
Installing or Upgrading CDK Powered By Apache Kafka® .....	31
<i>General Information Regarding Installation and Upgrade</i> .....	31

<i>Rolling Upgrade to CDK 3.0.x Powered By Apache Kafka®</i> .....	31
<i>Graceful Shutdown of Kafka Brokers</i> .....	32
<i>Disks and Filesystem</i> .....	33
<i>Installing or Upgrading Kafka from a Parcel</i> .....	33
<i>Installing or Upgrading Kafka from a Package</i> .....	34
<i>Migrating from Apache Kafka to CDK Powered By Apache Kafka</i> .....	34
<i>Steps for Migrating from Apache Kafka to Cloudera Distribution of Apache Kafka</i> .....	35

## **Using Apache Kafka.....37**

Using Apache Kafka Command-line Tools.....	37
Using Apache Kafka with Apache Spark Streaming.....	38
Using Apache Kafka with Apache Flume.....	38
Additional Considerations When Using Apache Kafka.....	40

## **Apache Kafka Administration.....42**

Configuring Apache Kafka Security.....	42
<i>Deploying SSL for Kafka</i> .....	42
<i>Using Kafka Supported Protocols</i> .....	45
<i>Enabling Kerberos Authentication</i> .....	46
<i>Enabling Encryption at Rest</i> .....	47
<i>Using Kafka with Sentry Authorization</i> .....	47
Configuring High Availability and Consistency for Apache Kafka.....	50
Configuring Apache Kafka for Performance and Resource Management.....	52
<i>Partitions and Memory Usage</i> .....	52
<i>Garbage Collection</i> .....	53
<i>Handling Large Messages</i> .....	53
<i>Tuning Kafka for Optimal Performance</i> .....	55
<i>Configuring JMX Ephemeral Ports</i> .....	56
<i>Quotas</i> .....	56
<i>Setting User Limits for Kafka</i> .....	57
Viewing Apache Kafka Metrics.....	57
Working with Apache Kafka Logs.....	57

## **Appendix: Apache License, Version 2.0.....59**

## CDK Powered By Apache Kafka®

CDK Powered By Apache Kafka® is a distributed commit log service. Kafka functions much like a publish/subscribe messaging system, but with better throughput, built-in partitioning, replication, and fault tolerance. Kafka is a good solution for large scale message processing applications. It is often used in tandem with Apache Hadoop, Apache Storm, and Spark Streaming.

You might think of a log as a time-sorted file or data table. Newer entries are appended to the log over time, from left to right. The log entry number is a convenient replacement for a timestamp.

Kafka integrates this unique abstraction with traditional publish/subscribe messaging concepts (such as producers, consumers, and brokers), parallelism, and enterprise features for improved performance and fault tolerance.

The original use case for Kafka was to track user behavior on websites. Site activity (page views, searches, or other actions users might take) is published to central topics, with one topic per activity type.

Kafka can be used to monitor operational data, aggregating statistics from distributed applications to produce centralized data feeds. It also works well for log aggregation, with low latency and convenient support for multiple data sources.

Kafka provides the following:

- Persistent messaging with  $O(1)$  disk structures, meaning that the execution time of Kafka's algorithms is independent of the size of the input. Execution time is constant, even with terabytes of stored messages.
- High throughput, supporting hundreds of thousands of messages per second, even with modest hardware.
- Explicit support for partitioning messages over Kafka servers. It distributes consumption over a cluster of consumer machines while maintaining the order of the message stream.
- Support for parallel data load into Hadoop.

## Understanding Kafka Terminology


Kafka and Cloudera Manager use terms in ways that might vary from other technologies. This topic provides definitions for how these terms are used in Kafka with Cloudera Manager.

A *service* is an application that runs in a CDH cluster. Kafka is a service. ZooKeeper is a service that runs within a Kafka cluster. Other services include MapReduce, HDFS, YARN, Flume, and Spark.

A *role* is a feature of a service. A *broker* is a role in a Kafka service.




An *instance* is a deployed and configured software component. A cluster can include multiple roles and multiple instances of the same role. A *service instance* might be `Kafka-1`. `Kafka-1` might host the *role instances* `Broker-1`, `Broker-2`, and `Broker-3`.

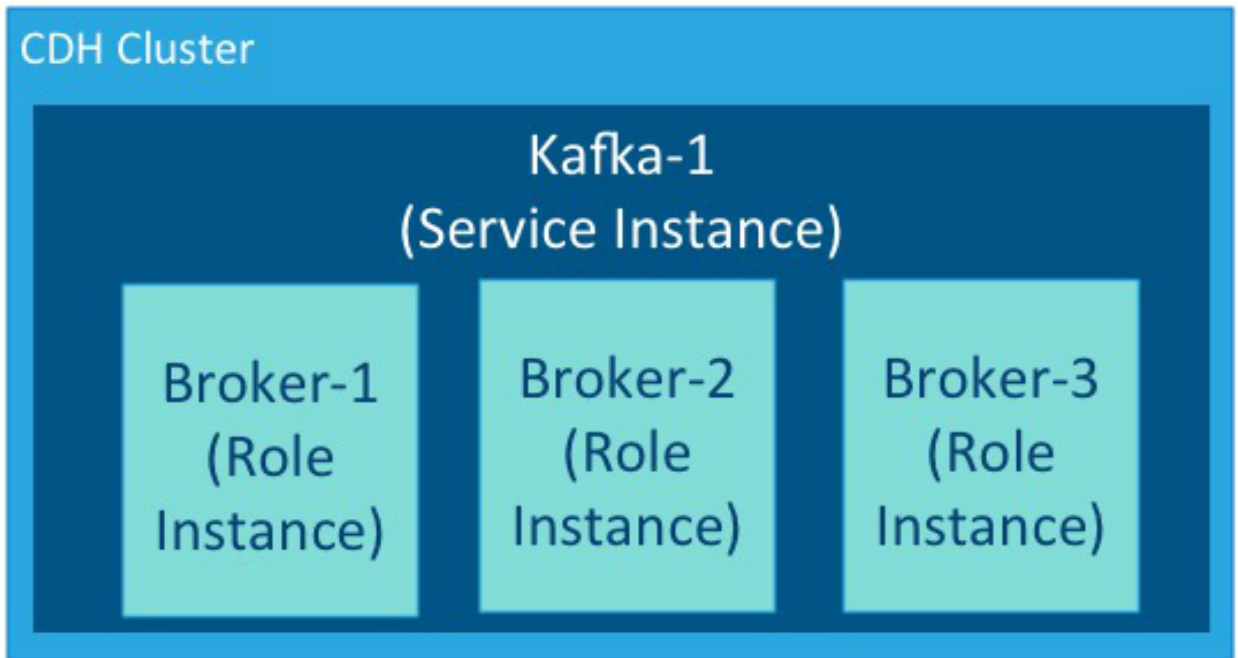


Kafka brokers process *records* organized into *topics*. A topic is a category of records that share similar characteristics. For example, a topic might consist of instant messages from social media or navigation information for users on a web site. Each topic has a unique corresponding table in data storage.

A *producer* is an external process that sends records to a Kafka topic. A *consumer* is an external process that receives topic streams from a Kafka cluster.

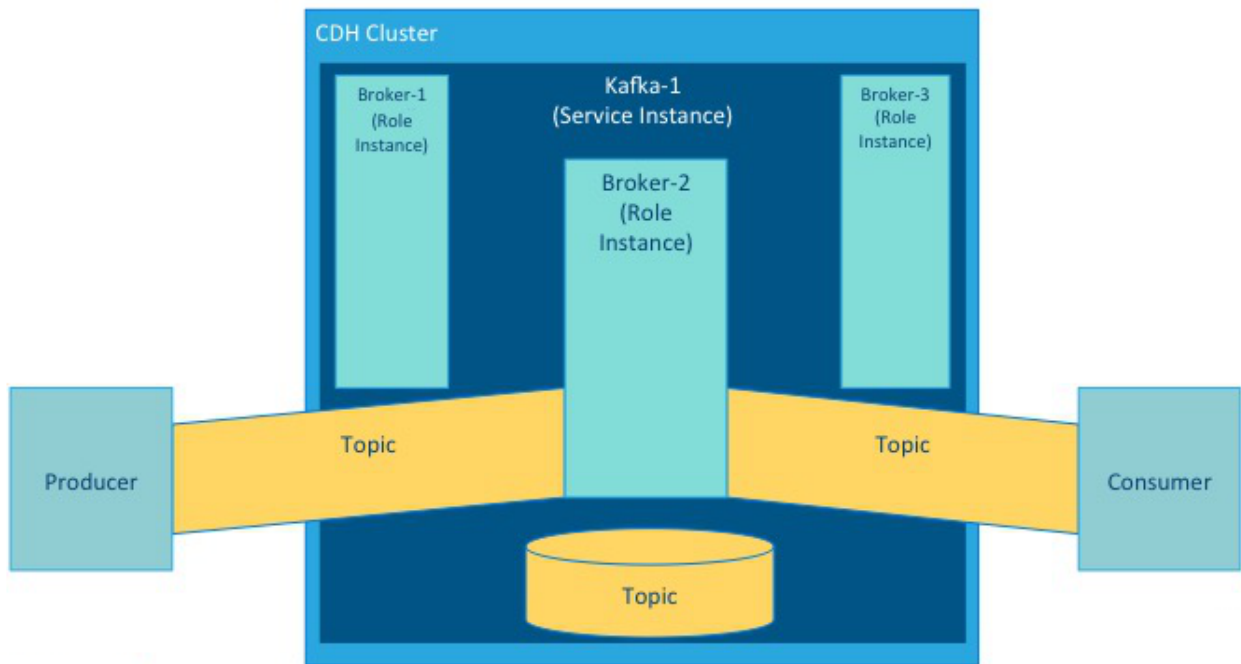


Brokers process topics in *partitions*. A partition on one broker in a cluster is the *leader*. The same partition is mirrored on one or more other brokers in the cluster as *replicas*. When a leader goes offline, a replica automatically takes its place and becomes the new leader for the topic. An *in-sync replica* is a replica that is completely up-to-date with the leader.

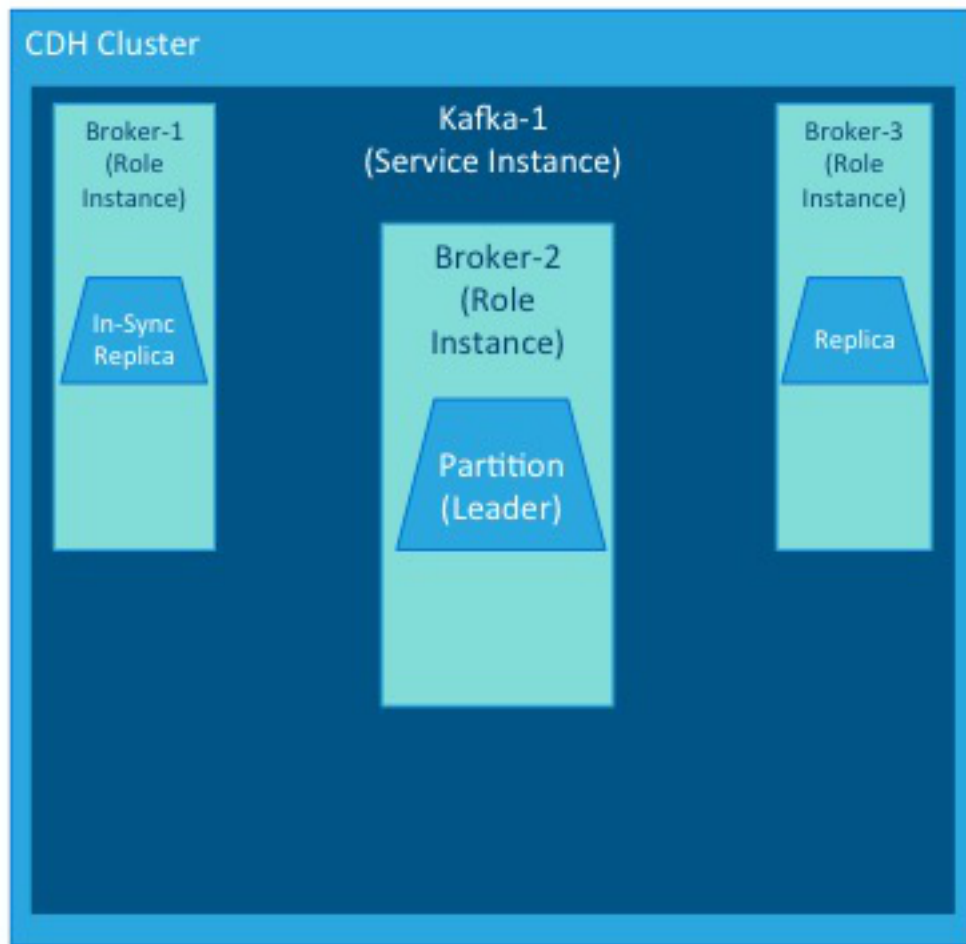


Each Kafka cluster has one broker that also acts as the *controller*. The controller is responsible for managing the states of partitions and replicas. It also performs administrative tasks, such as reassigning partitions.



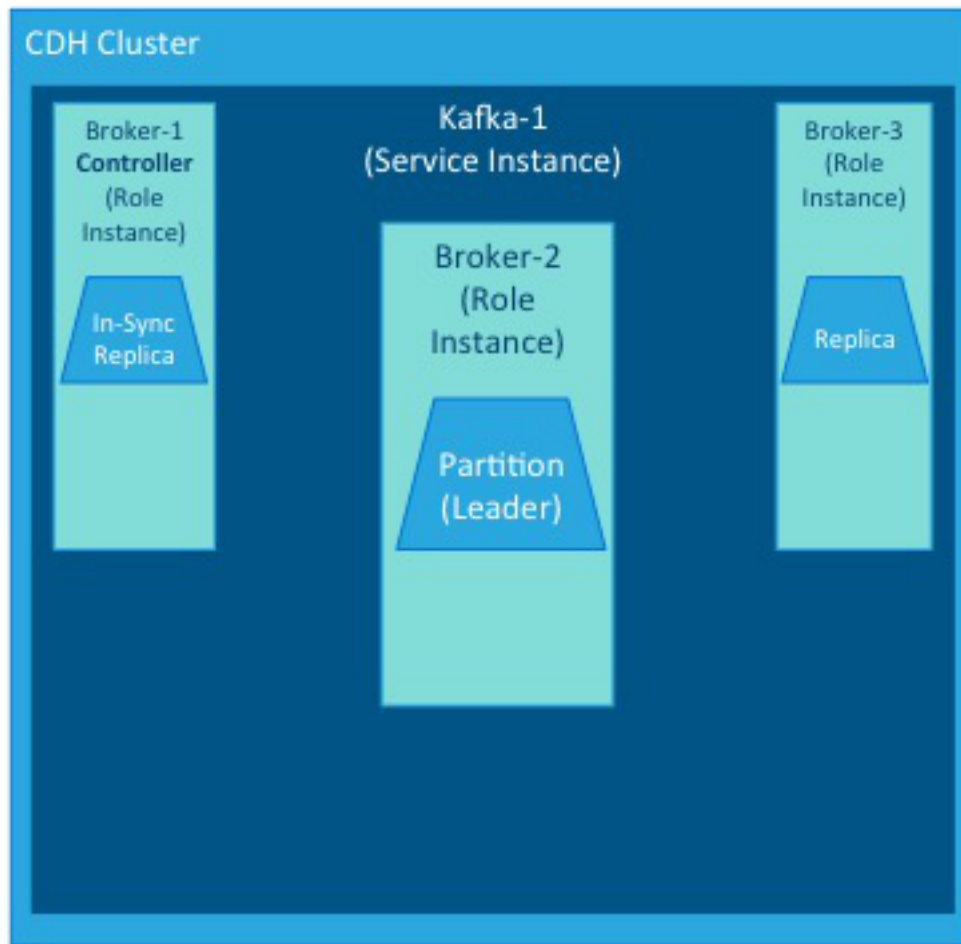

While these illustrations show single instances of the components of a Kafka implementation, Kafka brokers typically host multiple partitions and replicas, with any number of producers and consumers, up to the requirements and limits of the deployed system.

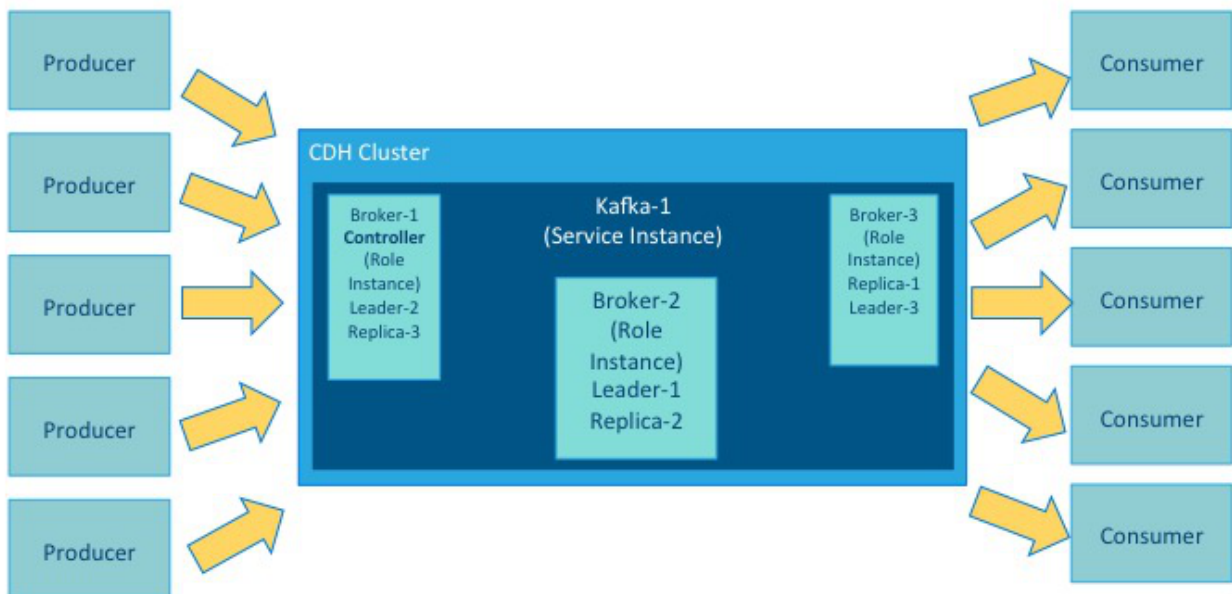

## CDK Powered By Apache Kafka® Release Notes

CDK Powered By Apache Kafka® provides a release guide that contains release and download information for installers and administrators. It includes release notes as well as information about versions and downloads. The guide also provides a release matrix that shows which major and minor release version of a product is supported with which release version of CDK Powered By Apache Kafka.

The Release Guide is comprised of topics including:

### What's New in CDK Powered By Apache Kafka?

This section lists new features in CDK Powered By Apache Kafka. The following links provide detailed information for each release:

#### New Features in CDK 3.0.0 Powered By Apache Kafka

- **Rebase on Kafka 0.11.0.0**

CDK 3.0.0 Powered By Apache Kafka is a major release based on Apache Kafka 0.11.0.0. See [https://archive.apache.org/dist/kafka/0.11.0.0/RELEASE\\_NOTES.html](https://archive.apache.org/dist/kafka/0.11.0.0/RELEASE_NOTES.html).

- **Health test for offline and lagging partitions**

New health tests set the controller broker's health to BAD if the broker hosts at least one offline partition and the leader broker's health to CONCERNING if it hosts any lagging partitions. Supported with Cloudera Manager 5.14.0.

#### New Features in CDK 2.2.0 Powered By Apache Kafka

- **Rebase on Kafka 0.10.2**

CDK 2.2.0 Powered By Apache Kafka is rebased on Apache Kafka 0.10.2. See [https://archive.apache.org/dist/kafka/0.10.2.0/RELEASE\\_NOTES.html](https://archive.apache.org/dist/kafka/0.10.2.0/RELEASE_NOTES.html).

#### New Features in CDK 2.1.0 Powered By Apache Kafka

- **Rebase on Kafka 0.10**

Cloudera Distribution of Apache Kafka 2.1.0 is rebased on Apache Kafka 0.10. See [https://archive.apache.org/dist/kafka/0.10.0.0/RELEASE\\_NOTES.html](https://archive.apache.org/dist/kafka/0.10.0.0/RELEASE_NOTES.html).

- **Sentry Authentication**

Apache Sentry includes Kafka binding you can use to enable authorization in Kafka with Sentry. See [Configuring Kafka to Use Sentry Authorization](#) on page 47.

#### New Features in Cloudera Distribution CDK 2.0.0 Powered By Apache Kafka

- **Rebase on Kafka 0.9**

CDK 2.0.0 Powered By Apache Kafka is rebased on Apache Kafka 0.9. See [https://archive.apache.org/dist/kafka/0.9.0.0/RELEASE\\_NOTES.html](https://archive.apache.org/dist/kafka/0.9.0.0/RELEASE_NOTES.html).

- **Kerberos**

CDK 2.0.0 Powered By Apache Kafka supports Kerberos authentication of connections from clients and other brokers, including to ZooKeeper.

- **SSL**

CDK 2.0.0 Powered By Apache Kafka supports wire encryption of communications from clients and other brokers using SSL.

- **New Consumer API**

CDK 2.0.0 Powered By Apache Kafka includes a new Java API for consumers.

- **MirrorMaker**

MirrorMaker is enhanced to help prevent data loss and improve reliability of cross-data center replication.

- **Quotas**

You can use per-user quotas to throttle producer and consumer throughput in a multitenant cluster. See [Quotas](#) on page 56.

#### New Features in CDK 1.4.0 Powered By Apache Kafka

- CDK 1.4.0 Powered By Apache Kafka is distributed as a package as well as a parcel. See [CDK Powered By Apache Kafka® Version and Packaging Information](#) on page 24.

#### New Features in CDK 1.3.2 Powered By Apache Kafka

- **RHEL 7.1**

Kafka 1.3.2 supports RHEL 7.1. See [Supported Operating Systems](#) on page 12

#### New features in CDK 1.3.0 Powered By Apache Kafka

- **Metrics Reporter**

Cloudera Manager now displays Kafka metrics. Use the values to identify current performance issues and plan enhancements to handle anticipated changes in workload. See [Viewing Apache Kafka Metrics](#) on page 57.

- **MirrorMaker configuration**

Cloudera Manager allows you to configure the Kafka MirrorMaker cross-cluster replication service. You can add a MirrorMaker role and use it to replicate to a machine in another cluster. See [Kafka MirrorMaker](#).

#### New Features in CDK 1.1.0 Powered By Apache Kafka

- **New producer**

The producer added in CDK 1.1.0 Powered By Apache Kafka combines features of the existing synchronous and asynchronous producers. Send requests are batched, allowing the new producer to perform as well as the asynchronous producer under load. Every send request returns a response object that can be used to retrieve status and exceptions.

- **Ability to delete topics**

You can now delete topics using the `kafka-topics --delete` command.

- **Offset management**

In previous versions, consumers that wanted to keep track of which messages were consumed did so by updating the offset of the last consumed message in ZooKeeper. With this new feature, Kafka itself tracks the offsets. Using offset management can significantly improve consumer performance.

- **Automatic leader rebalancing**

Each partition starts with a randomly selected leader replica that handles requests for that partition. When a cluster first starts, the leaders are evenly balanced among hosts. When a broker restarts, leaders from that broker are distributed to other brokers, which results in an unbalanced distribution. With this feature enabled, leaders are assigned to the original replica after a restart.

- **Connection quotas**

Kafka administrators can limit the number of connections allowed from a single IP address. By default, this limit is 10 connections per IP address. This prevents misconfigured or malicious clients from destabilizing a Kafka broker by opening a large number of connections and using all available file handles.

## CDK Powered By Apache Kafka Requirements and Supported Versions

The following sections describe software requirements and supported versions of complementary software for CDK Powered By Apache Kafka:

### Supported CDH and Cloudera Manager Releases

For the list of supported releases of CDH and Cloudera Manager, see [CDH and Cloudera Manager Supported Versions](#).

#### Supported Integrations

- Flume and Spark connectors to Kafka are included with CDH 5.7.x and higher and only work with Kafka 2.0.x and higher.
- Sentry authorization integration with Kafka only works with Kafka 2.1.x and higher on CDH 5.9.x and higher.

### Supported Operating Systems

For the list of supported operating systems, see [CDH and Cloudera Manager Supported Operating Systems](#).

#### SUSE Linux Enterprise Server (SLES)

Unlike CentOS, SLES limits virtual memory by default. Changing this default requires adding the following entries to the `/etc/security/limits.conf` file:

```
* hard as unlimited
* soft as unlimited
```

### Supported JDK Versions

CDK 3.0.0 Powered By Apache Kafka supports Java 8. It does not support Java 7. For a listed of supported and tested JDK versions for Kafka 3.0.0, see [JDK 8](#).

For a listed of supported and tested JDK versions for CDK 2.2.x Powered By Apache Kafka and below, see [CDH and Cloudera Manager Supported JDK Versions](#).



**Note:** If you decide to use the G1 garbage collector and you use JDK 1.7, make sure you use u51 or newer.

### Ports Used by Kafka

Kafka uses the TCP ports listed in the following table. Before deploying Kafka, ensure that these ports are open on each system.

Component	Service	Port	Access Requirement	Comment
Broker	TCP Port	9092	External/Internal	The primary communication port used by producers and consumers; also used for inter-broker communication.

Component	Service	Port	Access Requirement	Comment
Broker	TLS/SSL Port	9093	External/Internal	A secured communication port used by producers and consumers; also used for inter-broker communication.
Broker	JMX Port	9393	Internal	Internal use only. Used for administration via JMX.
MirrorMaker	JMX Port	9394	Internal	Internal use only. Used to administer the producer and consumer of the MirrorMaker.
Broker	HTTP Metric Report Port	24042	Internal	Internal use only. This is the port via which the HTTP metric reporter listens. It is used to retrieve metrics through HTTP instead of JMX.

## Issues Fixed in CDK Powered By Apache Kafka

The following upstream issues are fixed in each release of CDK Powered By Apache Kafka:

### Issues Fixed in CDK 3.0.0 Powered By Apache Kafka

- [KAFKA-5600](#): Group loading regression causing stale metadata/offsets cache: when a `__consumer_offsets` partition gets segmented, and Kafka is restarted and offsets are reloaded, consumers start at a wrong position if metadata and offset events are in both segments.
- [KAFKA-5506](#): Add system test for connector failure/restartFix NPE in `OffsetFetchRequest.toString` and logging improvements.
- [KAFKA-5522](#): `ListOffsets` should bound timestamp search by LSO in `read_committed`.
- [KAFKA-5556](#): Fix `IllegalStateException` in `KafkaConsumer.commitSync` due to missing future completion check.
- [KAFKA-5584](#): Fix integer overflow in `Log.size`.
- [KAFKA-5611](#): `AbstractCoordinator` should handle wakeup raised from `onJoinComplete`.
- [KAFKA-5630](#): Consumer should block on corrupt records and keep throwing an exception.
- [KAFKA-5634](#): Do not allow segment deletion beyond high watermark.
- [KAFKA-5658](#): Fix `AdminClient` request timeout handling bug resulting in continual `BrokerNotAvailableExceptions`.
- [KAFKA-5700](#): Producer should not drop header information when splitting batches.
- [KAFKA-5737](#): `KafkaAdminClient` thread should be daemon.
- [KAFKA-5752](#): Update index files correctly during async delete.

### Issues Fixed in CDK 2.2.0 Powered by Apache Kafka

- [KAFKA-4525](#): Kafka should not require SSL truststore password
- [KAFKA-4811](#): `ReplicaFetchThread` may fail to create due to existing metric
- [KAFKA-4741](#): Fix potential buffer leak in `RecordAccumulator` in case of exception
- [KAFKA-4735](#): Fix deadlock issue during MM shutdown
- [KAFKA-4636](#): Per listener security settings overrides (KIP-103)
- [KAFKA-5150](#): Reduce lz4 decompression overhead
- [KAFKA-5316](#): `LogCleaner` should account for larger record sets after cleaning
- [KAFKA-5097](#): Fix regression in consumer caused by unsafe access to potentially unassigned partitions
- [KAFKA-4959](#): Remove controller concurrent access to non-threadsafe `NetworkClient`, `Selector`, and `SSLEngine`

- [KAFKA-4631](#); Request metadata in consumer if topic/partitions unavailable

### Issues Fixed in CDK 2.1.2 Powered By Apache Kafka

- [KAFKA-3863](#): Add system test for connector failure/restart.
- [KAFKA-3994](#): Deadlock between consumer heartbeat expiration and offset commit.

### Issues Fixed in CDK 2.1.1 Powered By Apache Kafka

- [KAFKA-724](#): Allow automatic socket.send.buffer from operating system in SocketServer
- [KAFKA-2684](#): Add force option to topic / config command so they can be called programatically
- [KAFKA-2720](#): Expire group metadata when all offsets have expired
- [KAFKA-2948](#): Remove unused topics from producer metadata set
- [KAFKA-3111](#): Fix ConsumerPerformance reporting to use time-based instead of message-based intervals
- [KAFKA-3158](#): ConsumerGroupCommand should tell whether group is actually dead
- [KAFKA-3175](#): Topic not accessible after deletion even when delete.topic.enable is disabled
- [KAFKA-3501](#): Console consumer process hangs on exit
- [KAFKA-3562](#): Handle topic deletion during a send
- [KAFKA-3645](#): Fix ConsumerGroupCommand and ConsumerOffsetChecker to correctly read endpoint info from ZK
- [KAFKA-3716](#): Validate all timestamps are not negative
- [KAFKA-3719](#): Allow underscores in hostname
- [KAFKA-3748](#): Add consumer-property to console tools consumer
- [KAFKA-3774](#): Make 'time' an optional argument of GetOffsetShell
- [KAFKA-3810](#): replication of internal topics should not be limited by replica.fetch.max.bytes
- [KAFKA-3934](#): Start scripts enable GC by default with no way to disable
- [KAFKA-3965](#): MirrorMaker should not commit offset when exception is thrown from producer.send
- [KAFKA-4158](#): Reset quota to default value if quota override is deleted
- [KAFKA-4229](#): Controller can't start after several zk expired event
- [KAFKA-4319](#): Parallelize shutdown of fetchers in AbstractFetcherManager to speedup shutdown
- [KAFKA-4360](#): Controller may deadLock when autoLeaderRebalance encounter ZK expired
- [KAFKA-4428](#): Kafka does not exit if port is already bound

### Issues Fixed in CDK 2.1.0 Powered By Apache Kafka

- [KAFKA-3787](#): Preserve the message timestamp in MirrorMaker
- [KAFKA-3789](#): Upgrade Snappy to fix Snappy decompression errors
- [KAFKA-3802](#): Log mtimes reset on broker restart or shutdown
- [KAFKA-3894](#): Log cleaner can partially clean a segment
- [KAFKA-3915](#): Do not convert messages from v0 to v1 during log compaction
- [KAFKA-3933](#): Always fully read deepliterator
- [KAFKA-3950](#): Only throw authorization exception if pattern subscription matches topic
- [KAFKA-3977](#): Defer fetch parsing for space efficiency and to ensure exceptions are raised to the user
- [KAFKA-4050](#): Allow configuration of the PRNG used for SSL
- [KAFKA-4073](#): MirrorMaker should handle messages without timestamp correctly

Cloudera Distribution of Apache Kafka 2.1.0 is rebased on Apache Kafka 0.10. For a complete list of fixed issues, see [https://www.apache.org/dyn/closer.cgi?path=/kafka/0.10.0.0/RELEASE\\_NOTES.html](https://www.apache.org/dyn/closer.cgi?path=/kafka/0.10.0.0/RELEASE_NOTES.html).

### Issues Fixed in CDK 2.0.2 Powered By Apache Kafka

- [KAFKA-3495](#): NetworkClient.blockingSendAndReceive should rely on requestTimeout.
- [KAFKA-2998](#): Log warnings when client is disconnected from bootstrap brokers.
- [KAFKA-3488](#): Avoid failing of unsent requests in consumer where possible.
- [KAFKA-3528](#): Handle wakeups while rebalancing more gracefully.

- [KAFKA-3594](#): After calling `MemoryRecords.close()` method, `hasRoomFor()` method should return `false`.
- [KAFKA-3602](#): Rename `RecordAccumulator dequeFor()` and ensure proper usage.
- [KAFKA-3789](#): Upgrade Snappy to fix Snappy decompression errors.
- [KAFKA-3830](#): `getTGT()` debug logging exposes confidential information.
- [KAFKA-3840](#): Allow clients default OS buffer sizes.
- [KAFKA-3691](#): Confusing logging during metadata update timeout.
- [KAFKA-3810](#): Replication of internal topics should not be limited by `replica.fetch.max.bytes`.
- [KAFKA-3854](#): Fix issues with new consumer's subsequent regex (pattern) subscriptions.

### Issues Fixed in CDK 2.0.1 Powered By Apache Kafka

- [KAFKA-3409](#): MirrorMaker hangs indefinitely due to commit.
- [KAFKA-3378](#): Client blocks forever if `SocketChannel` connects instantly.
- [KAFKA-3426](#): Improve protocol type errors when invalid sizes are received.
- [KAFKA-3330](#): Truncate log cleaner offset checkpoint if the log is truncated.
- [KAFKA-3463](#): Change default receive buffer size for consumer to 64K.
- [KAFKA-1148](#): Delayed fetch/producer requests should be satisfied on a leader change.
- [KAFKA-3352](#): Avoid DNS reverse lookups.
- [KAFKA-3341](#): Improve error handling on invalid requests.
- [KAFKA-3310](#): Fix for NPEs observed when throttling clients.
- [KAFKA-2784](#): swallow exceptions when MirrorMaker exits.
- [KAFKA-3243](#): Fix Kafka basic ops documentation for MirrorMaker, blacklist is not supported for new consumers.
- [KAFKA-3235](#): Unclosed stream in `AppInfoParser` static block.
- [KAFKA-3147](#): Memory records is not writable in MirrorMaker.
- [KAFKA-3088](#): Broker crash on receipt of produce request with empty client ID.
- [KAFKA-3159](#): Kafka consumer client poll is very CPU intensive under certain conditions.
- [KAFKA-3189](#): Kafka server returns `UnknownServerException` for inherited exceptions.
- [KAFKA-3157](#): MirrorMaker does not commit offset with low traffic.
- [KAFKA-3179](#): Kafka consumer delivers message whose offset is earlier than sought offset.
- [KAFKA-3198](#): Ticket Renewal Thread exits prematurely due to inverted comparison.

### Issues Fixed in CDK 2.0.0 Powered By Apache Kafka

- [KAFKA-2799](#): `WakeupException` thrown in the followup `poll()` could lead to data loss.
- [KAFKA-2878](#): Kafka broker throws `OutOfMemory` exception with invalid join group request.
- [KAFKA-2880](#): `Fetcher.getTopicMetadata` `NullPointerException` when broker cannot be reached.
- [KAFKA-2882](#): Add constructor cache for Snappy and LZ4 Output/Input streams in `Compressor.java`
- [KAFKA-2913](#): `GroupMetadataManager` unloads all groups in `removeGroupsForPartitions`.
- [KAFKA-2942](#): Inadvertent auto-commit when pre-fetching can cause message loss.
- [KAFKA-2950](#): Fix performance regression in the producer.
- [KAFKA-2973](#): Fix leak of child sensors on remove.
- [KAFKA-2978](#): Consumer stops fetching when consumed and fetch positions get out of sync.
- [KAFKA-2988](#): Change default configuration of the log cleaner.
- [KAFKA-3012](#): Avoid reserved.broker.max.id collisions on upgrade.

### Issues Fixed in CDK 1.4.0 Powered By Apache Kafka

- [KAFKA-1664](#): Kafka does not properly parse multiple ZK nodes with non-root chroot.
- [KAFKA-1994](#): Evaluate performance effect of chroot check on Topic creation.
- [KAFKA-2002](#): It does not work when `kafka_mx4jenable` is false.
- [KAFKA-2024](#): Cleaner can generate unindexable log segments.



- [KAFKA-2048](#): java.lang.IllegalMonitorStateException thrown in AbstractFetcherThread when handling error returned from simpleConsumer.
- [KAFKA-2050](#): Avoid calling .size() on java.util.ConcurrentLinkedQueue.
- [KAFKA-2088](#): kafka-console-consumer.sh should not create zookeeper path when no brokers found and chroot was set in zookeeper.connect.
- [KAFKA-2118](#): Cleaner cannot clean after shutdown during replaceSegments.
- [KAFKA-2477](#): Fix a race condition between log append and fetch that causes OffsetOutOfRangeException.
- [KAFKA-2633](#): Default logging from tools to Stderr.

### Issues Fixed in CDK 1.3.2 Powered By Apache Kafka

- [KAFKA-1057](#): Trim whitespaces from user specified configs
- [KAFKA-1641](#): Log cleaner exits if last cleaned offset is lower than earliest offset
- [KAFKA-1702](#): Messages silently lost by the (old) producer
- [KAFKA-1758](#): corrupt recovery file prevents startup
- [KAFKA-1836](#): metadata.fetch.timeout.ms set to zero blocks forever
- [KAFKA-1866](#): LogStartOffset gauge throws exceptions after log.delete()
- [KAFKA-1883](#): NullPointerException in RequestSendThread
- [KAFKA-1896](#): Record size function of record in mirror maker hit NPE when the message value is null.
- [KAFKA-2012](#): Broker should automatically handle corrupt index files
- [KAFKA-2096](#): Enable keepalive socket option for broker to prevent socket leak
- [KAFKA-2114](#): Unable to set default min.insync.replicas
- [KAFKA-2189](#): Snappy compression of message batches less efficient in 0.8.2.1
- [KAFKA-2234](#): Partition reassignment of a nonexistent topic prevents future reassignments
- [KAFKA-2235](#): LogCleaner offset map overflow
- [KAFKA-2336](#): Changing offsets.topic.num.partitions after the offset topic is created breaks consumer group partition assignment
- [KAFKA-2393](#): Correctly Handle InvalidTopicException in KafkaApis.getTopicMetadata()
- [KAFKA-2406](#): ISR propagation should be throttled to avoid overwhelming controller
- [KAFKA-2407](#): Only create a log directory when it will be used
- [KAFKA-2437](#): Fix ZookeeperLeaderElector to handle node deletion correctly
- [KAFKA-2468](#): SIGINT during Kafka server startup can leave server deadlocked
- [KAFKA-2504](#): Stop logging WARN when client disconnects

### Issues Fixed in CDK 1.3.1 Powered By Apache Kafka

- [KAFKA-972](#) - MetadataRequest returns stale list of brokers
- [KAFKA-1367](#) - Broker topic metadata not kept in sync with ZooKeeper
- [KAFKA-1867](#) - liveBroker list not updated on a cluster with no topics
- [KAFKA-2308](#) - New producer + Snappy face un-compression errors after broker restart
- [KAFKA-2317](#) - De-register isrChangeNotificationListener on controller resignation
- [KAFKA-2337](#) - Verify that metric names will not collide when creating new topics

### Issues Fixed in CDK 1.3.0 Powered By Apache Kafka

- [KAFKA-2009](#) - Fix UncheckedOffset.removeOffset synchronization and trace logging issue in mirror maker
- [KAFKA-1984](#) - Java producer may miss an available partition
- [KAFKA-1971](#) - Starting a broker with a conflicting id will delete the previous broker registration
- [KAFKA-1952](#) - High CPU Usage in 0.8.2 release
- [KAFKA-1919](#) - Metadata request issued with no backoff in new producer if there are no topics



## Issues Fixed in CDK 1.2.0 Powered By Apache Kafka

- [KAFKA-1642](#) - [Java New Producer Kafka Trunk] CPU Usage Spike to 100% when network connection is lost
- [KAFKA-1650](#) - avoid data loss when mirror maker shutdown uncleanly
- [KAFKA-1797](#) - add the serializer/deserializer api to the new java client -
- [KAFKA-1667](#) - topic-level configuration not validated
- [KAFKA-1815](#) - ServerShutdownTest fails in trunk
- [KAFKA-1861](#) - Publishing kafka-client:test in order to utilize the helper utils in TestUtils
- [KAFKA-1729](#) - Add constructor to javaapi to allow constructing explicitly versioned offset commit requests
- [KAFKA-1902](#) - fix MetricName so that Yammer reporter can work correctly
- [KAFKA-1890](#) - Fix bug preventing Mirror Maker from successful rebalance
- [KAFKA-1891](#) - MirrorMaker hides consumer exception - making troubleshooting challenging
- [KAFKA-1706](#) - Add a byte bounded blocking queue utility
- [KAFKA-1879](#) - Log warning when receiving produce requests with acks > 1
- [KAFKA-1876](#) - pom file for scala 2.11 should reference a specific version
- [KAFKA-1761](#) - num.partitions documented default is 1 while actual default is 2
- [KAFKA-1210](#) - Windows Bat files are not working properly
- [KAFKA-1864](#) - Revisit defaults for the internal offsets topic
- [KAFKA-1870](#) - Cannot commit with simpleConsumer on Zookeeper only with Java API
- [KAFKA-1868](#) - ConsoleConsumer shouldn't override dual.commit.enabled to false if not explicitly set
- [KAFKA-1841](#) - OffsetCommitRequest API - timestamp field is not versioned
- [KAFKA-1723](#) - make the metrics name in new producer more standard
- [KAFKA-1819](#) Cleaner gets confused about deleted and re-created topics
- [KAFKA-1851](#) - OffsetFetchRequest returns extra partitions when input only contains unknown partitions
- [KAFKA-1512](#) - Fixes for limit the maximum number of connections per ip address
- [KAFKA-1624](#) - bump up default scala version to 2.11.4 to compile with java 8
- [KAFKA-742](#) - Existing directories under the Kafka data directory without any data cause process to not start
- [KAFKA-1698](#) - Validator.ensureValid() only validates default config value
- [KAFKA-1799](#) - ProducerConfig.METRIC\_REPORTER\_CLASSES\_CONFIG doesn't work
- [KAFKA-1743](#) - ConsumerConnector.commitOffsets in 0.8.2 is not backward compatible
- [KAFKA-1769](#) - javadoc should only include client facing packages
- [KAFKA-1481](#) - Stop using dashes AND underscores as separators in MBean names
- [KAFKA-1721](#) - Snappy compressor is not thread safe
- [KAFKA-1764](#) - ZookeeperConsumerConnector should not put multiple shutdown commands to the same data chunk queue
- [KAFKA-1733](#) - Producer.send will block indeterminately when broker is unavailable
- [KAFKA-1742](#) - ControllerContext removeTopic does not correctly update state
- [KAFKA-1738](#) - Partitions for topic not created after restart from forced shutdown
- [KAFKA-1647](#) - Replication offset checkpoints (high water marks) can be lost on hard kills and restarts
- [KAFKA-1732](#) - DumpLogSegments tool fails when path has a '.'

## Known Issues in CDK Powered By Apache Kafka

The following sections describe known issues in CDK Powered By Apache Kafka:

### Unsupported features

- In CDK 3.0.0 Powered By Apache Kafka, the idempotent and transactional capabilities in the producer are currently an unsupported beta feature given their maturity and complexity. Future releases will support this feature.
- Kafka Connect is included with CDK 2.0.0 and higher Powered By Apache Kafka, but is not supported at this time. Instead, we recommend Flume and Sqoop as proven solutions for batch and real time data loading that complement

Kafka's message broker capability. See [Flafka: Apache Flume Meets Apache Kafka for Event Processing](#) for more information.

In addition, Spark and Spark Streaming can be used to get the functionality of "Kafka Streaming" and have a fully functional ETL pipeline. See [Using Apache Kafka with Apache Spark Streaming](#) for more information.

- The Kafka default authorizer is included with CDK 2.0.0 and higher Powered By Apache Kafka, but is not supported at this time. This includes setting ACLs and all related APIs, broker functionality, and command-line tools.

### Potential to bypass transaction and idempotent ACL checks in Apache Kafka

It is possible to manually craft a Produce request which bypasses transaction and idempotent ACL validation. Only authenticated clients with Write permission on the respective topics are able to exploit this vulnerability.

#### Products affected:

- CDH
- CDK Powered by Apache Kafka

#### Releases affected:

- CDH versions 6.0.x, 6.1.x, 6.2.0
- CDK versions 3.0.x, 3.1.x, 4.0.x

**Users affected:** All users who run Kafka in CDH and CDK.

**Date/time of detection:** September, 2018

**Severity (Low/Medium/High):** 7.1 (High) ([CVSS:3.0/AV:N/AC:L/PR:L/UI:N/S:U/C:L/I:H/A:H](#))

**Impact:** Attackers can exploit this issue to bypass certain security restrictions to perform unauthorized actions. This can aid in further attacks.

**CVE:** CVE-2018-17196

**Immediate action required:** Update to a version of CDH containing the fix.

#### Addressed in release/refresh/patch:

- CDH 6.2.1, 6.3.2
- CDK 4.1.0

**Knowledge article:** For the latest update on this issue see the corresponding Knowledge article: [TSB 2020-378: Potential to bypass transaction and idempotent ACL checks in Apache Kafka](#)

### Invalid property mentioned in Kafka 2.0.2 message

The `max.poll.records` property mentioned in the following error message is invalid.

```
2018-02-26 09:59:59,727 ERROR org.apache.flume.source.BasicSourceSemantics: Unexpected
error performing start: name = source2
org.apache.kafka.clients.consumer.CommitFailedException: Commit cannot be completed
since the group has already rebalanced and assigned the partitions to another member.
This means that the time between subsequent calls to poll() was longer than the configured
session.timeout.ms, which typically implies that the poll loop is spending too much
time message processing. You can address this either by increasing the session timeout
or by reducing the maximum size of batches returned in poll() with max.poll.records.
```

**Affected versions:** CDK Powered By Apache Kafka 2.0.2

**Workaround:** Ignore the invalid property and increase the session timeout to resolve this issue.

### Kafka does not work with Apache Sentry HA

You cannot use Sentry high availability with Kafka. If Sentry HA is enabled, Kafka might intermittently lose the connection to Sentry and you won't be able to authorize users.

**Affected Versions:** All versions of CDK Powered By Apache Kafka with CDH 5.13.x and 5.14.x

**Workaround:** Do not enable Sentry high availability.

**Cloudera JIRA:** CDH-56519

### Topics created with the kafka-topics tool may not be secured

Topics that are created and deleted via Kafka are secured (for example, auto created topics). However, most topic creation and deletion is done via the kafka-topics tool, which talks directly to Zookeeper or some other third-party tool that talks directly to Zookeeper. Since this is the responsibility of Zookeeper authorization and authentication, Kafka cannot prevent users from making Zookeeper changes. Anyone with access to Zookeeper can create and delete topics. Note that they will not be able to describe, read, or write to the topics even if they can create them.

The following commands talk directly to Zookeeper and therefore are not secured via Kafka:

- kafka-topics.sh
- kafka-configs.sh
- kafka-preferred-replica-election.sh
- kafka-reassign-partitions.sh

### Topic-level metrics do not display in Cloudera Manager for topics that contain a period (.) in the topic name

If you have Kafka topics that contain a period (.) in the topic name, Cloudera Manager might not display the topic-level metrics for those topics in the Charts Library. Only topic-level metrics are affected.

**Cloudera JIRA:** CDH-64370

**Affected Versions:** CDK 3.0.0 Powered By Apache Kafka

**Workaround:** Contact Cloudera support.

### offsets.topic.replication.factor must be less than or equal to the number of live brokers (CDK 3.0.0 Powered By Apache Kafka only)

In CDK 3.0.0 Powered By Apache Kafka, the offsets.topic.replication.factor broker config is now enforced upon auto topic creation. Internal auto topic creation will fail with a GROUP\_COORDINATOR\_NOT\_AVAILABLE error until the cluster size meets this replication factor requirement.

### Kafka stuck with under-replicated partitions after ZooKeeper session expires

This problem might occur when your Kafka cluster includes a large number of under-replicated Kafka partitions. One or more broker logs include messages such as the following:

```
[2016-01-17 03:36:00,888] INFO Partition [__samza_checkpoint_event-creation_1,3] on
broker 3: Shrinking ISR for partition [__samza_checkpoint_event-creation_1,3] from 6,5
to 5 (kafka.cluster.Partition)
[2016-01-17 03:36:00,891] INFO Partition [__samza_checkpoint_event-creation_1,3] on
broker 3: Cached zkVersion [66] not equal to that in zookeeper, skip updating ISR
(kafka.cluster.Partition)
```

There will also be an indication of the ZooKeeper session expiring in one or more Kafka broker logs around the same time as the previous errors:

```
INFO zookeeper state changed (Expired) (org.I0Itec.zkclient.ZkClient)
```

The log is typically in `/var/log/kafka` on each host where a Kafka broker is running. The location is set by the property `kafka.log4j.dir` in Cloudera Manager. The log name is `kafka-broker-hostname.log`. In diagnostic bundles, the log is under `logs/hostname-ip-address/`.

**Affected Versions:** CDK 1.4.x, 2.0.x, 2.1.x, 2.2.x Powered By Apache Kafka

**Partial Fix:** CDK 3.0.0 Powered By Apache Kafka and later are less likely to encounter this issue.

**Workaround:** To move forward after seeing this problem, restart the Kafka brokers affected. You can restart individual brokers from the **Instances** tab in the Kafka service page in Cloudera Manager.



**Note:** If restarting the brokers does not resolve the problem, you might not have this issue; see [KAFKA-3083 A soft failure in controller may leave a topic partition in an inconsistent state](#). This problem also involves the ZooKeeper session expiring, but will not involve the error message with `Cached zkVersion [XX] not equal to that in zookeeper`.

To reduce the chances of this issue happening again, do what you can to make sure ZooKeeper sessions do not expire:

- Reduce the potential for long garbage collection pauses by brokers:
  - Use a better garbage collection mechanism in the JVM, such as G1GC. You can do this by adding `-XX:+UseG1GC` in the `broker_java_opts`.
  - Increase broker heap size if it is too small (`broker_max_heap_size`) (be careful that you don't choose a heap size that can cause out-of-memory problems given all the services running on the node).
- Increase the ZooKeeper session timeout configuration on brokers (`zookeeper.session.timeout.ms`), to reduce the likelihood that sessions expire.
- Ensure ZooKeeper itself is well resourced and not overwhelmed, so it can respond. For example, it is highly recommended to locate the ZooKeeper log directory is on its own disk.

**Cloudera JIRA:** CDH-42514

**Apache JIRA:** KAFKA-2729

[Kafka client jars included in CDH might not match the newest Kafka parcel jar](#)

The Kafka client jars included in CDH may not match the newest Kafka parcel jar that is released. This is done to maintain compatibility across CDH 5.7 and higher for integrations such as Spark and Flume.

[The Flume and Spark connectors to Kafka shipped with CDH 5.7 and higher only work with CDK 2.x Powered By Apache Kafka](#)

Use CDK 2.x Powered By Apache Kafka to be compatible with the Flume and Spark connectors included with CDH 5.7.x.

[Only new Java clients support authentication and authorization](#)

The legacy Scala clients (producer and consumer) that are under the `kafka.producer.*` and `kafka.consumer.*` package do not support authentication.

**Workaround:** Migrate to the new Java producer and consumer APIs.

[Requests fail when sending to a nonexistent topic with `auto.create.topics.enable` set to true](#)

The first few produce requests fail when sending to a nonexistent topic with `auto.create.topics.enable` set to true.

**Affected Versions:** All

**Workaround:** Increase the number of `retries` in the Producer configuration settings.

Custom Kerberos principal names must not be used for Kerberized ZooKeeper and Kafka instances

When using ZooKeeper authentication and a custom Kerberos principal, Kerberos-enabled Kafka does not start.

**Affected Versions:** CDK 2.0.0 and higher Powered By Apache Kafka

**Workaround:** None. You must disable ZooKeeper authentication for Kafka or use the default Kerberos principals for ZooKeeper and Kafka.

Performance degradation when SSL is enabled

Significant performance degradation can occur when SSL is enabled. The impact varies, depending on your CPU type and JVM version. The reduction is generally in the range 20-50%.

**Affected Versions:** CDK 2.0.0 and higher Powered By Apache Kafka

**Workaround for CDK 2.1.0 and higher Powered By Apache Kafka:** Configure brokers and clients with `ssl.secure.random.implementation = SHA1PRNG` to drastically reduce this degradation.

AdminUtils is not binary-compatible between Cloudera Distribution of CDK 1.x and 2.x Powered By Apache Kafka

The AdminUtils APIs have changed between CDK 1.x and 2.x Powered By Apache Kafka. If your application uses AdminUtils APIs, you must modify your application code to use the new APIs before you compile your application against CDK 2.x Powered By Apache Kafka.



**Note:** AdminUtils APIs are not part of the publicly supported CDK Powered By Apache Kafka API.

Source cluster not definable in CDK1.x Powered By Apache Kafka

In CDK 1.x Powered By Apache Kafka, the source cluster is assumed to be the cluster that MirrorMaker is running on. In CDK 2.0 Powered By Apache Kafka, you can define a custom source and target cluster.

Monitoring is not supported in Cloudera Manager 5.4

If you use CDK 1.2 Powered By Apache Kafka with Cloudera Manager 5.4, you must disable monitoring.

MirrorMaker does not start when Sentry is enabled

When MirrorMaker is used in conjunction with Sentry, MirrorMaker reports an authorization issue and does not start. This is due to Sentry being unable to authorize the `kafka_mirror_maker` principal which is automatically created.

**Workaround:** Complete the following steps prior to enabling Sentry:

1. Create the `kafka_mirror_maker` Linux user ID and the `kafka_mirror_maker` Linux group ID on the MirrorMaker hosts. Use the following command:

```
useradd kafka_mirror_maker
```

2. Create the necessary Sentry rules for the `kafka_mirror_maker` group.



**Note:** Alternatively, you can add the `kafka_mirror_maker` user to `super.users`, this bypasses authorization.

**Affected Versions:** CDK 2.1.1 and higher Powered by Apache Kafka

**Fixed Versions:** N/A

**Apache JIRA:** N/A

**Cloudera JIRA:** CDH-53706

#### Authenticated Kafka clients may impersonate other users

Authenticated Kafka clients may impersonate any other user via a manually crafted protocol message with SASL/PLAIN or SASL/SCRAM authentication when using the built-in PLAIN or SCRAM server implementations in Apache Kafka.

Note that the SASL authentication mechanisms that apply to this issue are neither recommended nor supported by Cloudera. In Cloudera Manager (CM) there are [four choices](#): PLAINTEXT, SSL, SASL\_PLAINTEXT, and SASL\_SSL. The SASL/PLAIN option described in this issue is not the same as SASL\_PLAINTEXT option in CM. That option uses Kerberos and is not affected. As a result it is highly unlikely that Kafka is susceptible to this issue when managed by CM unless the authentication protocol is overridden by an Advanced Configuration Snippet (Safety Valve).

**Products affected:** CDK Powered by Apache Kafka

**Releases affected:** CDK 2.1.0 to 2.2.0, CDK 3.0.0

**Users affected:** All users

**Detected by:** Rajini Sivaram (rsivaram@apache.org)

**Severity (Low/Medium/High):**8.3 (High) ([CVSS:3.0/AV:N/AC:L/PR:L/UI:N/S:U/C:L/I:H/A:H](#))

**Impact:**Privilege escalation.

**CVE:**CVE-2017-12610

**Immediate action required:** Upgrade to a newer version of CDK Powered by Apache Kafka where the issue has been fixed.

**Addressed in release/refresh/patch:** CDK 3.1, CDH 6.0 and higher

**Knowledge article:** For the latest update on this issue see the corresponding Knowledge article: [TSB 2018-332: Two Kafka Security Vulnerabilities: Authenticated Kafka clients may impersonate other users and and may interfere with data replication](#)

#### Authenticated clients may interfere with data replication

Authenticated Kafka users may perform an action reserved for the Broker via a manually created fetch request interfering with data replication, resulting in data loss.

**Products affected:** CDK Powered by Apache Kafka

**Releases affected:** CDK 2.0.0 to 2.2.0, CDK 3.0.0

**Users affected:** All users

**Detected by:** Rajini Sivaram (rsivaram@apache.org)

**Severity (Low/Medium/High):**6.3 (Medium) ([CVSS:3.0/AV:N/AC:L/PR:L/UI:N/S:U/C:L/I:L/A:L](#))

**Impact:**Potential data loss due to improper replication.

**CVE:**CVE-2018-1288

**Immediate action required:** Upgrade to a newer version of CDK Powered by Apache Kafka where the issue has been fixed.

**Addressed in release/refresh/patch:** CDK 3.1, CDH 6.0 and higher

**Knowledge article:** For the latest update on this issue see the corresponding Knowledge article: [TSB 2018-332: Two Kafka Security Vulnerabilities: Authenticated Kafka clients may impersonate other users and and may interfere with data replication](#)

## CDK Powered By Apache Kafka Incompatible Changes and Limitations

This section describes incompatible changes and limitations:



**Warning:** The open file handlers of CDK 2.2.0 Powered By Apache Kafka will increase by roughly 33% because of the addition of time index files for each segment.

### Flume version requires to be matched to a minimum Kafka version

The CDH Flume version requires to be matched to a minimum Kafka version. This means that if you upgrade to Kafka 2.2, you need to upgrade brokers as well as clients.

- In CDH 5.7 and higher, the Flume connector to Kafka only works with Kafka 2.0 and higher.
- In CDH 5.14 and higher, the Flume connector to Kafka only works with Kafka 2.2 and higher.

We recommend that you have the Kafka broker running the same or newer version as the client.

Flume shipped with CDH 5.7 and lower can only send data to CDK 2.0 and higher Powered By Apache Kafka via unsecured transport

Security additions to CDK 2.0 Powered By Apache Kafka are not supported by Flume in CDH 5.7 (or lower versions).

### Topic Blacklist Removed

The MirrorMaker **Topic blacklist** setting has been removed in CDK 2.0 and higher Powered By Apache Kafka.

### Avoid Data Loss Option Removed

The **Avoid Data Loss** option from earlier releases has been removed in CDK 2.0 Powered By Apache Kafka in favor of automatically setting the following properties.

#### 1. Producer settings

- `acks=all`
- `retries=max integer`
- `max.block.ms=max long`

#### 2. Consumer setting

- `auto.commit.enable=false`

#### 3. MirrorMaker setting

- `abort.on.send.failute=true`

## CDK Powered By Apache Kafka® Version and Packaging Information

This section describes naming conventions for CDK Powered By Apache Kafka® package versions, lists versions and where to download components.

For installation instructions, see [Installing, Migrating and Upgrading CDK Powered By Apache Kafka](#) on page 31.

### Examples of CDK Powered By Apache Kafka Versions

Cloudera packages are designed to be transparent and easy to understand. CDK Powered By Apache Kafka package versions are labeled using the following format:

```
base_version+cloudera_version+patch_level
```

where:

- `base_version` is the version of the open-source component included in the Cloudera package.
- `cloudera_version` is the version of the Cloudera package.
- `patch_level` is the number of source commits applied on top of the base version forked from the Apache Kafka branch. Note that the number of commits does not indicate the number of functional changes or bug fixes in the release. For example, a commit can be used to amend a version number or make other non-functional changes.

### Cloudera Distribution of Apache Kafka Versions

**Table 1: Cloudera Distribution of Apache Kafka Version Information**

Cloudera Distribution of Apache Kafka Version	Component	Version	Release Notes	Parcel Repository
3.0.0	Apache Kafka	0.11.0+kafka3.0.0+50	<a href="#">Release notes</a>	<a href="#">Cloudera Distribution of Apache Kafka 3.0.0 Parcel Repository</a>
2.2.0	Apache Kafka	0.10.2.0+kafka2.2.0+110	<a href="#">Release notes</a>	<a href="#">Cloudera Distribution of Apache Kafka 2.2.0 Parcel Repository</a>
2.1.2	Apache Kafka	0.10.0.1+kafka2.1.2+6	<a href="#">Release notes</a>	<a href="#">Cloudera Distribution of Apache Kafka 2.1.2 Parcel Repository</a>
2.1.1	Apache Kafka	0.10.0.0+kafka2.1.1+21	<a href="#">Release notes</a>	<a href="#">Cloudera Distribution of Apache Kafka 2.1.1 Parcel Repository</a>
2.1.0	Apache Kafka	0.10.0.0+kafka2.1.0+63	<a href="#">Release notes</a>	<a href="#">Cloudera Distribution of Apache Kafka 2.1.0 Parcel Repository</a>
2.0.2	Apache Kafka	0.9.0.0+kafka2.0.2+305	<a href="#">Release notes</a>	<a href="#">Cloudera Distribution of Apache Kafka 2.0.2 Parcel Repository</a>



Cloudera Distribution of Apache Kafka Version	Component	Version	Release Notes	Parcel Repository
2.0.1	Apache Kafka	0.9.0.0+kafka2.0.1+283	<a href="#">Release notes</a>	<a href="#">Cloudera Distribution of Apache Kafka 2.0.1 Parcel Repository</a>
2.0.0	Apache Kafka	0.9.0.0+kafka2.0.0+188	<a href="#">Release notes</a>	<a href="#">Cloudera Distribution of Apache Kafka 2.0.0 Parcel Repository</a>
1.4.0	Apache Kafka	0.8.2.0+kafka1.4.0+127	<a href="#">Release notes</a>	<a href="#">Cloudera Distribution of Apache Kafka 1.4.0 Parcel Repository</a>
1.3.2	Apache Kafka	0.8.2.0+kafka1.3.2+116	<a href="#">Release notes</a>	<a href="#">Cloudera Distribution of Apache Kafka 1.3.2 Parcel Repository</a>
1.3.1	Apache Kafka	0.8.2.0+kafka1.3.1+80	<a href="#">Release notes</a>	<a href="#">Cloudera Distribution of Apache Kafka 1.3.1 Parcel Repository</a>
1.3.0	Apache Kafka	0.8.2.0+kafka1.3.0+72	<a href="#">Release notes</a>	<a href="#">Cloudera Distribution of Apache Kafka 1.3.0 Parcel Repository</a>
1.2.0	Apache Kafka	0.8.2.0+kafka1.2.0+57	<a href="#">Release notes</a>	<a href="#">Cloudera Distribution of Apache Kafka 1.2.0 Parcel Repository</a>

Table 2: Compatible Release Versions for Cloudera Distribution of Apache Kafka 2.1.0

Type	Location	Parcel File
yum RHEL/CentOS/Oracle 7	<a href="http://archive.cloudera.com/kafka/redhat/7/x86_64/kafka/">http://archive.cloudera.com/kafka/redhat/7/x86_64/kafka/</a>	<a href="http://archive.cloudera.com/kafka/parcels/2.1.0/KAFKA-2.1.0-1.2.1.0.p0.115-el7.parcel">http://archive.cloudera.com/kafka/parcels/2.1.0/KAFKA-2.1.0-1.2.1.0.p0.115-el7.parcel</a>
yum RHEL/CentOS/Oracle 6	<a href="http://archive.cloudera.com/kafka/redhat/6/x86_64/kafka/">http://archive.cloudera.com/kafka/redhat/6/x86_64/kafka/</a>	<a href="http://archive.cloudera.com/kafka/parcels/2.1.0/KAFKA-2.1.0-1.2.1.0.p0.115-el6.parcel">http://archive.cloudera.com/kafka/parcels/2.1.0/KAFKA-2.1.0-1.2.1.0.p0.115-el6.parcel</a>
yum RHEL/CentOS/Oracle 5	<a href="http://archive.cloudera.com/kafka/redhat/5/x86_64/kafka/">http://archive.cloudera.com/kafka/redhat/5/x86_64/kafka/</a>	<a href="http://archive.cloudera.com/kafka/parcels/2.1.0/KAFKA-2.1.0-1.2.1.0.p0.115-el5.parcel">http://archive.cloudera.com/kafka/parcels/2.1.0/KAFKA-2.1.0-1.2.1.0.p0.115-el5.parcel</a>
Debian Jesse 8.2	<a href="https://archive.cloudera.com/kafka/debian/jessie/amd64/kafka/dists">https://archive.cloudera.com/kafka/debian/jessie/amd64/kafka/dists</a>	<a href="http://archive.cloudera.com/kafka/parcels/2.1.0/KAFKA-2.1.0-1.2.1.0.p0.115-jessie.parcel">http://archive.cloudera.com/kafka/parcels/2.1.0/KAFKA-2.1.0-1.2.1.0.p0.115-jessie.parcel</a>
apt Debian Wheezy 7.0	<a href="https://archive.cloudera.com/kafka/debian/wheezy/amd64/kafka/dists">https://archive.cloudera.com/kafka/debian/wheezy/amd64/kafka/dists</a>	<a href="http://archive.cloudera.com/kafka/parcels/2.1.0/KAFKA-2.1.0-1.2.1.0.p0.115-wheezy.parcel">http://archive.cloudera.com/kafka/parcels/2.1.0/KAFKA-2.1.0-1.2.1.0.p0.115-wheezy.parcel</a>
zypper/YaST SLES 12	<a href="https://archive.cloudera.com/kafka/sles/12/x86_64/kafka/">https://archive.cloudera.com/kafka/sles/12/x86_64/kafka/</a>	<a href="http://archive.cloudera.com/kafka/parcels/2.1.0/KAFKA-2.1.0-1.2.1.0.p0.115-sles12.parcel">http://archive.cloudera.com/kafka/parcels/2.1.0/KAFKA-2.1.0-1.2.1.0.p0.115-sles12.parcel</a>

Type	Location	Parcel File
zypper/YaST SLES 11	<a href="https://archive.cloudera.com/kafka/sles/11/x86_64/kafka/">https://archive.cloudera.com/kafka/sles/11/x86_64/kafka/</a>	<a href="http://archive.cloudera.com/kafka/parcels/2.1.0/KAFKA-2.1.0-1.2.1.0.p0.115-sles11.parcel">http://archive.cloudera.com/kafka/parcels/2.1.0/KAFKA-2.1.0-1.2.1.0.p0.115-sles11.parcel</a>
Ubuntu Trusty 14.04	<a href="https://archive.cloudera.com/kafka/ubuntu/trusty/amd64/kafka/dists">https://archive.cloudera.com/kafka/ubuntu/trusty/amd64/kafka/dists</a>	<a href="http://archive.cloudera.com/kafka/parcels/2.1.0/KAFKA-2.1.0-1.2.1.0.p0.115-trusty.parcel">http://archive.cloudera.com/kafka/parcels/2.1.0/KAFKA-2.1.0-1.2.1.0.p0.115-trusty.parcel</a>
Ubuntu Precise 12.04	<a href="https://archive.cloudera.com/kafka/ubuntu/precise/amd64/kafka/dists">https://archive.cloudera.com/kafka/ubuntu/precise/amd64/kafka/dists</a>	<a href="http://archive.cloudera.com/kafka/parcels/2.1.0/KAFKA-2.1.0-1.2.1.0.p0.115-precise.parcel">http://archive.cloudera.com/kafka/parcels/2.1.0/KAFKA-2.1.0-1.2.1.0.p0.115-precise.parcel</a>

**Table 3: Compatible Release Versions for Cloudera Distribution of Apache Kafka 1.4.0**

Type	Location	Parcel File
yum RHEL/CentOS/Oracle 7	<a href="http://archive.cloudera.com/kafka/redhat/7/x86_64/kafka/">http://archive.cloudera.com/kafka/redhat/7/x86_64/kafka/</a>	<a href="http://archive.cloudera.com/kafka/parcels/1.4.0/KAFKA-0.8.2.0-1.kafka1.4.0.p0.56-el5.parcel">http://archive.cloudera.com/kafka/parcels/1.4.0/KAFKA-0.8.2.0-1.kafka1.4.0.p0.56-el5.parcel</a>
yum RHEL/CentOS/Oracle 6	<a href="http://archive.cloudera.com/kafka/redhat/6/x86_64/kafka/">http://archive.cloudera.com/kafka/redhat/6/x86_64/kafka/</a>	<a href="http://archive.cloudera.com/kafka/parcels/1.4.0/KAFKA-0.8.2.0-1.kafka1.4.0.p0.56-el6.parcel">http://archive.cloudera.com/kafka/parcels/1.4.0/KAFKA-0.8.2.0-1.kafka1.4.0.p0.56-el6.parcel</a>
yum RHEL/CentOS/Oracle 5	<a href="http://archive.cloudera.com/kafka/redhat/5/x86_64/kafka/">http://archive.cloudera.com/kafka/redhat/5/x86_64/kafka/</a>	<a href="http://archive.cloudera.com/kafka/parcels/1.4.0/KAFKA-0.8.2.0-1.kafka1.4.0.p0.56-el7.parcel">http://archive.cloudera.com/kafka/parcels/1.4.0/KAFKA-0.8.2.0-1.kafka1.4.0.p0.56-el7.parcel</a>
apt Debian Wheezy 7.0	<a href="https://archive.cloudera.com/kafka/debian/wheezy/amd64/kafka/">https://archive.cloudera.com/kafka/debian/wheezy/amd64/kafka/</a>	<a href="http://archive.cloudera.com/kafka/parcels/1.4.0/KAFKA-0.8.2.0-1.kafka1.4.0.p0.56-wheezy.parcel">http://archive.cloudera.com/kafka/parcels/1.4.0/KAFKA-0.8.2.0-1.kafka1.4.0.p0.56-wheezy.parcel</a>
zypper/YaST SLES	<a href="https://archive.cloudera.com/kafka/sles/11/x86_64/kafka/">https://archive.cloudera.com/kafka/sles/11/x86_64/kafka/</a>	<a href="http://archive.cloudera.com/kafka/parcels/1.4.0/KAFKA-0.8.2.0-1.kafka1.4.0.p0.56-sles11.parcel">http://archive.cloudera.com/kafka/parcels/1.4.0/KAFKA-0.8.2.0-1.kafka1.4.0.p0.56-sles11.parcel</a>
Ubuntu Trusty 14.04	<a href="https://archive.cloudera.com/kafka/ubuntu/trusty/amd64/kafka/">https://archive.cloudera.com/kafka/ubuntu/trusty/amd64/kafka/</a>	<a href="http://archive.cloudera.com/kafka/parcels/1.4.0/KAFKA-0.8.2.0-1.kafka1.4.0.p0.56-trusty.parcel">http://archive.cloudera.com/kafka/parcels/1.4.0/KAFKA-0.8.2.0-1.kafka1.4.0.p0.56-trusty.parcel</a>
Ubuntu Precise 12.04	<a href="https://archive.cloudera.com/kafka/ubuntu/precise/amd64/kafka/">https://archive.cloudera.com/kafka/ubuntu/precise/amd64/kafka/</a>	<a href="http://archive.cloudera.com/kafka/parcels/1.4.0/KAFKA-0.8.2.0-1.kafka1.4.0.p0.56-precise.parcel">http://archive.cloudera.com/kafka/parcels/1.4.0/KAFKA-0.8.2.0-1.kafka1.4.0.p0.56-precise.parcel</a>

## Maven Artifacts for Kafka

The following table lists the project name, groupId, artifactId, and version required to access each Kafka artifact from a Maven POM. For information on how to use Kafka Maven artifacts, see [Using the CDH 5 Maven Repository](#).

The following table lists the project name, groupId, artifactId, and version required to access each Kafka 3.0.0 artifact.

Project	groupId	artifactId	version
Kafka	org.apache.kafka	connect	0.11.0-kafka-3.0.0
	org.apache.kafka	connect-api	0.11.0-kafka-3.0.0

Project	groupId	artifactId	version
	org.apache.kafka	connect-file	0.11.0-kafka-3.0.0
	org.apache.kafka	connect-json	0.11.0-kafka-3.0.0
	org.apache.kafka	connect-runtime	0.11.0-kafka-3.0.0
	org.apache.kafka	connect-transforms	0.11.0-kafka-3.0.0
	org.apache.kafka	kafka-clients	0.11.0-kafka-3.0.0
	org.apache.kafka	kafka-examples	0.11.0-kafka-3.0.0
	org.apache.kafka	kafka-log4j-appender	0.11.0-kafka-3.0.0
	org.apache.kafka	kafka-streams	0.11.0-kafka-3.0.0
	org.apache.kafka	kafka-streams-examples	0.11.0-kafka-3.0.0
	org.apache.kafka	kafka-tools	0.11.0-kafka-3.0.0

The following table lists the project name, groupId, artifactId, and version required to access each Kafka 2.2.0 artifact.

Project	groupId	artifactId	version
Kafka	org.apache.kafka	connect	0.10.2-kafka-2.2.0
	org.apache.kafka	connect-api	0.10.2-kafka-2.2.0
	org.apache.kafka	connect-file	0.10.2-kafka-2.2.0
	org.apache.kafka	connect-json	0.10.2-kafka-2.2.0
	org.apache.kafka	connect-runtime	0.10.2-kafka-2.2.0
	org.apache.kafka	connect-transforms	0.10.2-kafka-2.2.0
	org.apache.kafka	kafka-clients	0.10.2-kafka-2.2.0
	org.apache.kafka	kafka-examples	0.10.2-kafka-2.2.0
	org.apache.kafka	kafka-log4j-appender	0.10.2-kafka-2.2.0
	org.apache.kafka	kafka-streams	0.10.2-kafka-2.2.0

Project	groupId	artifactId	version
	org.apache.kafka	kafka-streams-examples	0.10.2-kafka-2.2.0
	org.apache.kafka	kafka-tools	0.10.2-kafka-2.2.0
	org.apache.kafka	kafka_2.10	0.10.2-kafka-2.2.0
	org.apache.kafka	kafka_2.11	0.10.2-kafka-2.2.0

The following table lists the project name, groupId, artifactId, and version required to access each Kafka 2.1.2. artifact.

Project	groupId	artifactId	version
Kafka	org.apache.kafka	connect	0.10.0-kafka-2.1.2
Kafka	org.apache.kafka	connect-api	0.10.0-kafka-2.1.2
Kafka	org.apache.kafka	connect-file	0.10.0-kafka-2.1.2
Kafka	org.apache.kafka	connect-json	0.10.0-kafka-2.1.2
Kafka	org.apache.kafka	connect-runtime	0.10.0-kafka-2.1.2
Kafka	org.apache.kafka	kafka-clients	0.10.0-kafka-2.1.2
Kafka	org.apache.kafka	kafka-examples	0.10.0-kafka-2.1.2
Kafka	org.apache.kafka	kafka-log4j-appender	0.10.0-kafka-2.1.2
Kafka	org.apache.kafka	kafka-streams	0.10.0-kafka-2.1.2
Kafka	org.apache.kafka	kafka-streams-examples	0.10.0-kafka-2.1.2
Kafka	org.apache.kafka	kafka-tools	0.10.0-kafka-2.1.2
Kafka	org.apache.kafka	kafka_210	0.10.0-kafka-2.1.2
Kafka	org.apache.kafka	kafka_2.11	0.10.0-kafka-2.1.2

The following table lists the project name, groupId, artifactId, and version required to access each Kafka 2.1.1. artifact.

Project	groupId	artifactId	version
Kafka	org.apache.kafka	connect	0.10.0-kafka-2.1.1

Project	groupId	artifactId	version
Kafka	org.apache.kafka	connect-api	0.10.0-kafka-2.1.1
Kafka	org.apache.kafka	connect-file	0.10.0-kafka-2.1.1
Kafka	org.apache.kafka	connect-json	0.10.0-kafka-2.1.1
Kafka	org.apache.kafka	connect-runtime	0.10.0-kafka-2.1.1
Kafka	org.apache.kafka	kafka-clients	0.10.0-kafka-2.1.1
Kafka	org.apache.kafka	kafka-examples	0.10.0-kafka-2.1.1
Kafka	org.apache.kafka	kafka-log4j-appender	0.10.0-kafka-2.1.1
Kafka	org.apache.kafka	kafka-streams	0.10.0-kafka-2.1.1
Kafka	org.apache.kafka	kafka-streams-examples	0.10.0-kafka-2.1.1
Kafka	org.apache.kafka	kafka-tools	0.10.0-kafka-2.1.1
Kafka	org.apache.kafka	kafka_2.10	0.10.0-kafka-2.1.1
Kafka	org.apache.kafka	kafka_2.11	0.10.0-kafka-2.1.1

The following table lists the project name, groupId, artifactId, and version required to access each Kafka 2.1.0 artifact.

Project	groupId	artifactId	version
Kafka	org.apache.kafka	connect	0.10.0-kafka-2.1.0
Kafka	org.apache.kafka	connect-api	0.10.0-kafka-2.1.0
Kafka	org.apache.kafka	connect-file	0.10.0-kafka-2.1.0
Kafka	org.apache.kafka	connect-json	0.10.0-kafka-2.1.0
Kafka	org.apache.kafka	connect-runtime	0.10.0-kafka-2.1.0
Kafka	org.apache.kafka	kafka-clients	0.10.0-kafka-2.1.0
Kafka	org.apache.kafka	kafka-examples	0.10.0-kafka-2.1.0
Kafka	org.apache.kafka	kafka-log4j-appender	0.10.0-kafka-2.1.0
Kafka	org.apache.kafka	kafka-tools	0.10.0-kafka-2.1.0
Kafka	org.apache.kafka	kafka_2.10	0.10.0-kafka-2.1.0

Project	groupId	artifactId	version
Kafka	org.apache.kafka	kafka_2.11	0.10.0-kafka-2.1.0

The following table lists the project name, groupId, artifactId, and version required to access each Kafka 2.0.0 artifact.

Project	groupId	artifactId	version
Kafka	org.apache.kafka	connect	0.9.0-kafka-2.0.0
	org.apache.kafka	connect-api	0.9.0-kafka-2.0.0
	org.apache.kafka	connect-file	0.9.0-kafka-2.0.0
	org.apache.kafka	connect-json	0.9.0-kafka-2.0.0
	org.apache.kafka	connect-runtime	0.9.0-kafka-2.0.0
	org.apache.kafka	kafka-clients	0.9.0-kafka-2.0.0
	org.apache.kafka	kafka-examples	0.9.0-kafka-2.0.0
	org.apache.kafka	kafka-log4j-appender	0.9.0-kafka-2.0.0
	org.apache.kafka	kafka-tools	0.9.0-kafka-2.0.0
	org.apache.kafka	kafka_2.10	0.9.0-kafka-2.0.0
	org.apache.kafka	kafka_2.11	0.9.0-kafka-2.0.0

The following table lists the project name, groupId, artifactId, and version required to access each Cloudera Distribution of Apache Kafka 1.4.0 artifact.

Project	groupId	artifactId	version
Kafka	org.apache.kafka	kafka-clients	0.8.2.0-kafka-1.4.0
Kafka	org.apache.kafka	kafka-examples	0.8.2.0-kafka-1.4.0
Kafka	org.apache.kafka	kafka_2.10	0.8.2.0-kafka-1.4.0

# Installing, Migrating and Upgrading CDK Powered By Apache Kafka

Minimum Required Role: **Cluster Administrator** (also provided by **Full Administrator**)



**Important:** As of February 1, 2021, all downloads of CDK, CDH, and Cloudera Manager require a username and password and use a modified URL. You must use the modified URL, including the username and password when downloading the repository contents described below. You may need to upgrade Cloudera Manager to a newer version that uses the modified URLs.

This can affect new installations, upgrades, adding new hosts to a cluster, downloading a new parcel, and adding a new cluster.

For more information, see [Updating an existing CDH/Cloudera Manager deployment to access downloads with authentication.](#)

The steps required to install or upgrade Kafka vary based on the version of Cloudera Manager you are using. This section describes several possible installation and upgrade scenarios. Before you install, review the Release Notes, particularly:

- [What's New in CDK Powered By Apache Kafka?](#) on page 10
- [CDK Powered By Apache Kafka Requirements and Supported Versions](#) on page 12
- [Known Issues in CDK Powered By Apache Kafka](#) on page 17

In addition, make sure to also review the [Kafka Product Compatibility Matrix](#).

## Installing or Upgrading CDK Powered By Apache Kafka®

Minimum Required Role: **Cluster Administrator** (also provided by **Full Administrator**)

Kafka is distributed as a parcel, separate from the CDH parcel. It is also distributed as a package. The steps to install Kafka vary, depending on whether you choose to install from a parcel or a package.

### General Information Regarding Installation and Upgrade

Cloudera Manager 5.4 and higher includes the Kafka service. To install, download Kafka using Cloudera Manager, distribute Kafka to the cluster, activate the new parcel, and add the service to the cluster. For a list of available parcels and packages, see [CDK Powered By Apache Kafka® Version and Packaging Information](#) on page 24

Colocation of Kafka and ZooKeeper services on the same host is possible. However, for optimal performance, Cloudera recommends the usage of dedicated hosts. This is especially true for larger, production environments.



**Note:** Upgrade instructions assume you want to upgrade parcel-based Kafka with parcels or package-based Kafka with packages. If you want to switch to using parcel-based Kafka using a Kafka package, you first must uninstall parcel-based Kafka. See [Uninstalling an Add-on Service](#).

### Rolling Upgrade to CDK 3.0.x Powered By Apache Kafka®

Before upgrading from CDK 2.x.x to CDK 3.0.x, ensure that you set `inter.broker.protocol.version` and `log.message.format.version` to the current Kafka version, and then unset them after the upgrade. This is a good practice because the newer broker versions might write log entries that the older brokers will not be able to read. And if you need to rollback to the older version, and you have not set `inter.broker.protocol.version` and `log.message.format.version`, data loss might occur.

Based on the current version of Kafka, use the following three-digit values to set `inter.broker.protocol.version` and `log.message.format.version`:

## Installing, Migrating and Upgrading CDK Powered By Apache Kafka

- To upgrade from CDK 2.0.x Powered By Apache Kafka, use 0.9.0
- To upgrade from CDK 2.1.x Powered By Apache Kafka, use 0.10.0
- To upgrade from CDK 2.2.x Powered By Apache Kafka, use 0.10.2

From the Cloudera Manager Admin Console:

### 1. Upgrade Kafka brokers to CDK 3.0.x Powered By Apache Kafka.

- a. Update `server.properties` file on all brokers with the following properties:  
`inter.broker.protocol.version = <current_Kafka_version>` and  
`log.message.format.version = <current_Kafka_version>`, as follows:
- b. From the **Clusters** menu, select the Kafka cluster.
- c. Click the **Configuration** tab.
- d. Use the Search field to find the **Kafka Broker Advanced Configuration Snippet (Safety Valve)** configuration property.
- e. Add the following properties to the **Kafka Broker Advanced Configuration Snippet (Safety Valve)** for `kafka.properties`:

To upgrade from CDK 2.0.x to CDK 3.0.x, enter:

```
inter.broker.protocol.version=0.9.0
```

```
log.message.format.version=0.9.0
```

To upgrade from CDK 2.1.x to CDK 3.0.x, enter:

```
inter.broker.protocol.version=0.10.0
```

```
log.message.format.version=0.10.0
```

To upgrade from CDK 2.2.x to CDK 3.0.x, enter:

```
inter.broker.protocol.version=0.10.2
```

```
log.message.format.version=0.10.2
```

Make sure you enter 3 digits for the version. Otherwise, the following error will occur:

```
2017-12-14 14:25:47,818 FATAL kafka.Kafka$:
java.lang.IllegalArgumentException: Version `0.10` is not a valid version
    at kafka.api.ApiVersion$$anonfun$apply$1.apply(ApiVersion.scala:72)
    at kafka.api.ApiVersion$$anonfun$apply$1.apply(ApiVersion.scala:72)
    at scala.collection.MapLike$class.getOrElse(MapLike.scala:128)
```

- f. Save your changes.

2. Download, distribute, and activate the new parcel. Do not restart the Kafka service, select **Activate Only** and click **OK**.
3. Perform a rolling restart. Select **Rolling Restart** or **Restart** based on the downtime that can be afforded.
4. Upgrade all CDK 2.x.x clients to CDK 3.0.x.
5. After the whole cluster restart is successful, remove the above settings and restart the cluster again.

## Graceful Shutdown of Kafka Brokers

If the Kafka brokers do not shut down gracefully, subsequent restarts may take longer than expected. This can happen when the brokers take longer than 30 seconds to clear their backlog while stopping the Kafka service, stopping the Kafka Broker role, or stopping a cluster where the Kafka service is running. The Kafka brokers are also shut down as



part of performing an upgrade. There are two configuration properties you can set to control whether Cloudera Manager waits for the brokers to shut down gracefully:

**Table 4: Kafka Shutdown Properties**

Property	Description	Default Value
<b>Enable Controlled Shutdown</b>	Enables controlled shutdown of the broker. If enabled, the broker moves all leaders on it to other brokers before shutting itself down. This reduces the unavailability window during shutdown.	Enabled
<b>Graceful Shutdown Timeout</b>	The timeout in milliseconds to wait for graceful shutdown to complete.	30000 milliseconds (30 seconds)

To configure these properties, go to **Clusters > Kafka Service > Configuration** and search for "shutdown".

If Kafka is taking a long time for controlled shutdown to complete, consider increasing the value of **Graceful Shutdown Timeout**. When this timeout is reached, Cloudera Manager issues a forced shutdown, which interrupts the controlled shutdown and could cause subsequent restarts to take longer than expected.

## Disks and Filesystem

Cloudera recommends that you use multiple drives to get good throughput. To ensure good latency, do not share the same drives used for Kafka data with application logs or other OS filesystem activity. You can either use RAID to combine these drives into a single volume, or format and mount each drive as its own directory. Since Kafka has replication, RAID can also provide redundancy at the application level. This choice has several tradeoffs.

If you configure multiple data directories, partitions are assigned round-robin to data directories. Each partition is stored entirely in one of the data directories. This can lead to load imbalance between disks if data is not well balanced among partitions.

RAID can potentially do a better job of balancing load between disks because it balances load at a lower level. The primary downside of RAID is that it is usually a big performance hit for write throughput, and it reduces the available disk space.

Another potential benefit of RAID is the ability to tolerate disk failures. However, rebuilding the RAID array is so I/O intensive that it can effectively disable the server, so this does not provide much improvement in availability.

## Installing or Upgrading Kafka from a Parcel

Minimum Required Role: **Cluster Administrator** (also provided by **Full Administrator**)

1. In Cloudera Manager, select **Hosts > Parcels**.
2. If you do not see Kafka in the list of parcels, you can add the parcel to the list.
  - a. Find the parcel for the version of Kafka you want to use on [Cloudera Distribution of Apache Kafka Versions](#) on page 24.
  - b. Copy the parcel repository link.
  - c. On the Cloudera Manager **Parcels** page, click **Configuration**.
  - d. In the field **Remote Parcel Repository URLs**, click + next to an existing parcel URL to add a new field.
  - e. Paste the parcel repository link.
  - f. Save your changes.
3. On the Cloudera Manager **Parcels** page, download the Kafka parcel, distribute the parcel to the hosts in your cluster, and then activate the parcel. See [Managing Parcels](#). After you activate the Kafka parcel, Cloudera Manager prompts you to restart the cluster. You *do not* need to restart the cluster after installing Kafka. Click **Close** to ignore this prompt.

4. Add the Kafka service to your cluster. See [Adding a Service](#).

### Installing or Upgrading Kafka from a Package

Minimum Required Role: **Cluster Administrator** (also provided by **Full Administrator**)

You install the Kafka package from the command line.

1. Navigate to the `/etc/repos.d` directory.
2. Use `wget` to download the Kafka repository. See [CDK Powered By Apache Kafka® Version and Packaging Information](#) on page 24.
3. Install Kafka using the appropriate commands for your operating system.

**Table 5: Kafka Installation Commands**

Operating System	Commands
RHEL-compatible	<pre>\$ sudo yum clean all \$ sudo yum install kafka \$ sudo yum install kafka-server</pre>
SLES	<pre>\$ sudo zypper clean --all \$ sudo zypper install kafka \$ sudo zypper install kafka-server</pre>
Ubuntu or Debian	<pre>\$ sudo apt-get update \$ sudo apt-get install kafka \$ sudo apt-get install kafka-server</pre>

4. Edit `/etc/kafka/conf/server.properties` to ensure that the `broker.id` is unique for each node and broker in Kafka cluster, and `zookeeper.connect` points to same ZooKeeper for all nodes and brokers.
5. Start the Kafka server with the following command:

```
$ sudo service kafka-server start.
```

To verify all nodes are correctly registered to the same ZooKeeper, connect to ZooKeeper using `zookeeper-client`.

```
$ zookeeper-client
$ ls /brokers/ids
```

You should see all of the IDs for the brokers you have registered in your Kafka cluster.

To discover to which node a particular ID is assigned, use the following command:

```
$ get /brokers/ids/<ID>
```

This command returns the host name of node assigned the ID you specify.

### Migrating from Apache Kafka to CDK Powered By Apache Kafka

Minimum Required Role: **Cluster Administrator** (also provided by **Full Administrator**)

This topic describes the required steps to migrate an existing Apache Kafka instance to CDK Powered By Apache Kafka.

## Assumptions

- You are migrating to a Kafka cluster managed by Cloudera Manager.
- You can plan a maintenance window for your migration.
- You are migrating from a compatible release version, as shown in the table below:

**Table 6: Compatible Release Versions**

From Apache Kafka	To CDK Powered By Apache Kafka
0.8.x	1.x
0.9.x	2.0.x
0.10.0	2.1.x
0.10.2	2.2.x



**Note:** Migration from Apache Kafka 0.7.x is not supported. If running Apache Kafka 0.7.x or earlier, you must first migrate to Apache Kafka 0.8.x or higher.

## Steps for Migrating from Apache Kafka to Cloudera Distribution of Apache Kafka

Cloudera recommends the following migration procedure. You must migrate brokers first, and then clients.

### Before You Begin

1. Shut down all existing producers, consumers, MirrorMaker instances, and Kafka brokers.
2. If not already installed, install Cloudera Manager. See [Installing Cloudera Manager, CDH, and Managed Services](#).
  - a. Add the CDH and Kafka parcels at installation time.
  - b. Do not add any services yet. Skip the install page by clicking the **Cloudera Manager** icon in the top navigation bar.

### Step 1. Migrating Zookeeper

Kafka stores its metadata in ZooKeeper. When migrating to Cloudera Distribution of Kafka, you must also migrate your ZooKeeper instance to the supported version included with CDH.

1. Shut down your existing ZooKeeper cluster.
2. Back up your `dataDir` and `dataLogDir` by copying them to another location or machine.
3. Add the ZooKeeper service to the cluster where you will run Cloudera Kafka. See [Adding a Service](#).
4. Add the ZooKeeper role to all machines that were running ZooKeeper.
5. Set any custom configuration from your old `zoo.cfg` file in Cloudera Manager.
6. Make sure `dataDir` and `dataLogDir` match your old configuration. This is important because this is where all your data is stored.
7. Make sure the `zookeeper` user owns the files in the `dataDir` and `dataLogDir`. For example:

```
ex: chown -R zookeeper /var/lib/zookeeper
```

8. Start the new ZooKeeper service.
9. Use the `zookeeper-client` CLI to validate that data exists. You should see nodes such as *brokers*, *consumers*, and *configs*. You might need to adjust your `chroot`. For example:

```
zookeeper-client -server hostname:port
                  ls /
```

## Installing, Migrating and Upgrading CDK Powered By Apache Kafka

### Step 2. Migrating Kafka Brokers

All producers, consumers, and Kafka brokers should still be shut down.

1. Back up your `log.dirs` from the old broker machines by copying them to another location or machine.
2. Add the Kafka service to the cluster where you migrated ZooKeeper. See [Adding a Service](#).
3. Add the `broker` role to all machines that were running brokers.
4. Make sure the `kafka` user owns the `log.dirs` files. For example:

```
chown -R kafka /var/local/Kafka/data
```

5. Set any custom configuration from your old `server.properties` file in Cloudera Manager.
  - Make sure to override the `broker.id` on each node to match the configured value in your old configurations. If these values do not match, Kafka treats your brokers as new brokers and not your existing ones.
  - Make sure `log.dirs` and `zookeeper.chroot` match your old configuration. All of your data and state information is stored here.
6. Start the Kafka brokers using Cloudera Manager.

### Step 3. Migrating MirrorMaker

These are the steps for migrating the MirrorMaker role. To avoid compatibility issues, migrate downstream clusters first.

1. Add the MirrorMaker role to all machines that were running MirrorMaker before.
2. Set any custom configuration from your old `producer.properties` and `consumer.properties` files in Cloudera Manager.
3. Start the MirrorMaker instances using Cloudera Manager.

### Step 4. Migrating Kafka Clients

Although Kafka might function with your existing clients, you must also upgrade all of your producers and consumers to have all Cloudera patches and bug fixes, and to have a fully supported system.

Migration requires that you change your Kafka dependencies from the Apache versions to the Cloudera versions, recompile your classes, and redeploy them. Use the Maven repository locations as described in [Maven Artifacts for Kafka](#) on page 26.

## Using Apache Kafka

This section describes ways you can use Apache Kafka tools to capture data for analysis.

### Using Apache Kafka Command-line Tools

Apache Kafka command-line tools are located in `/usr/bin`:

- `kafka-topics`

Create, alter, list, and describe topics. For example:

```
$ /usr/bin/kafka-topics --zookeeper zk01.example.com:2181 --list
sink1
t1
t2
$ /usr/bin/kafka-topics --create --zookeeper hostname:2181/kafka --replication-factor
2
--partitions 4 --topic topicname
```

- `kafka-console-consumer`

Read data from a Kafka topic and write it to standard output. For example:

```
$ /usr/bin/kafka-console-consumer --zookeeper zk01.example.com:2181 --topic t1
```

- `kafka-console-producer`

Read data from standard output and write it to a Kafka topic. For example:

```
$ /usr/bin/kafka-console-producer --broker-list
kafka02.example.com:9092,kafka03.example.com:9092 --topic t1
```

- `kafka-consumer-offset-checker` (deprecated)



**Note:** `kafka-consumer-offset-checker` is not supported in the new Consumer API. Use the `ConsumerGroupCommand` tool, below.

Check the number of messages read and written, as well as the lag for each consumer in a specific consumer group. For example:

```
$ /usr/bin/kafka-consumer-offset-checker --group flume --topic t1 --zookeeper
zk01.example.com:2181
```

- `kafka-consumer-groups`

To view offsets as in the previous example with the `ConsumerOffsetChecker`, you describe the consumer group using the following command:

```
$ /usr/bin/kafka-consumer-groups --zookeeper zk01.example.com:2181 --describe --group
flume
```

GROUP	TOPIC	PARTITION	CURRENT-OFFSET	LOG-END-OFFSET	LAG	OWNER
flume	t1	0	1	3	2	
test-consumer-group_postamac.local-1456198719410-29ccd54f-0						

## Using Apache Kafka with Apache Spark Streaming

For information on how to configure Apache Spark Streaming to receive data from Apache Kafka, see the appropriate version of the Spark Streaming + Kafka Integration Guide: [1.6.0](#) or [2.3.0](#).

In CDH 5.7 and higher, the Spark connector to Kafka only works with Kafka 2.0 and higher.

### Validating Kafka Integration with Spark Streaming

To validate your Kafka integration with Spark Streaming, run the `KafkaWordCount` example.

If you installed Spark using parcels, use the following command:

```
/opt/cloudera/parcels/CDH/lib/spark/bin/run-example streaming.KafkaWordCount <zkQuorum>
<group> <topics> <numThreads>
```

If you installed Spark using packages, use the following command:

```
/usr/lib/spark/bin/run-example streaming.KafkaWordCount <zkQuorum> <group>
<topics><numThreads>
```

Replace the variables as follows:

- `<zkQuorum>` - ZooKeeper quorum URI used by Kafka (for example, `zk01.example.com:2181, zk02.example.com:2181, zk03.example.com:2181`).
- `<group>` - Consumer group used by the application.
- `<topic>` - Kafka topic containing the data for the application.
- `<numThreads>` - Number of consumer threads reading the data. If this is higher than the number of partitions in the Kafka topic, some threads will be idle.



**Note:** If multiple applications use the same group and topic, each application receives a subset of the data.

## Using Apache Kafka with Apache Flume

In CDH 5.2 and higher, Apache Flume contains an Apache Kafka source and sink. Use these to stream data from Kafka to Hadoop or from any Flume source to Kafka.

In CDH 5.7 and higher, the Flume connector to Kafka only works with Kafka 2.0 and higher.



**Important:** Do not configure a Kafka source to send data to a Kafka sink. If you do, the Kafka source sets the topic in the event header, overriding the sink configuration and creating an infinite loop, sending messages back and forth between the source and sink. If you need to use both a source and a sink, use an interceptor to modify the event header and set a different topic.

For information on configuring Kafka to securely communicate with Flume, see [Configuring Flume Security with Kafka](#).

### Kafka Source

Use the Kafka source to stream data in Kafka topics to Hadoop. The Kafka source can be combined with any Flume sink, making it easy to write Kafka data to HDFS, HBase, and Solr.

The following Flume configuration example uses a Kafka source to send data to an HDFS sink:

```
tier1.sources = source1
tier1.channels = channel1
```

```

tier1.sinks = sink1

tier1.sources.source1.type = org.apache.flume.source.kafka.KafkaSource
tier1.sources.source1.kafka.bootstrap.servers = kafka-broker01.example.com:9092
tier1.sources.source1.kafka.topics = weblog
tier1.sources.source1.kafka.consumer.group.id = flume
tier1.sources.source1.channels = channel1
tier1.sources.source1.interceptors = i1
tier1.sources.source1.interceptors.i1.type = timestamp
tier1.sources.source1.kafka.consumer.timeout.ms = 100

tier1.channels.channel1.type = memory
tier1.channels.channel1.capacity = 10000
tier1.channels.channel1.transactionCapacity = 1000

tier1.sinks.sink1.type = hdfs
tier1.sinks.sink1.hdfs.path = /tmp/kafka/${topic}/%y-%m-%d
tier1.sinks.sink1.hdfs.rollInterval = 5
tier1.sinks.sink1.hdfs.rollSize = 0
tier1.sinks.sink1.hdfs.rollCount = 0
tier1.sinks.sink1.hdfs.fileType = DataStream
tier1.sinks.sink1.channel = channel1

```

For higher throughput, configure multiple Kafka sources to read from the same topic. If you configure all the sources with the same `kafka.consumer.group.id`, and the topic contains multiple partitions, each source reads data from a different set of partitions, improving the ingest rate.

For the list of Kafka Source properties, see [Kafka Source Properties](#).

For the full list of Kafka consumer properties, see the [Kafka documentation](#).

### Tuning Notes

The Kafka source overrides two Kafka consumer parameters:

1. `auto.commit.enable` is set to `false` by the source, and every batch is committed. For improved performance, set this to `true` using the `kafka.auto.commit.enable` setting. This can lead to data loss if the source goes down before committing.
2. `consumer.timeout.ms` is set to 10, so when Flume polls Kafka for new data, it waits no more than 10 ms for the data to be available. Setting this to a higher value can reduce CPU utilization due to less frequent polling, but introduces latency in writing batches to the channel.

### Kafka Sink

Use the Kafka sink to send data to Kafka from a Flume source. You can use the Kafka sink in addition to Flume sinks such as HBase or HDFS.

The following Flume configuration example uses a Kafka sink with an `exec` source:

```

tier1.sources = source1
tier1.channels = channel1
tier1.sinks = sink1

tier1.sources.source1.type = exec
tier1.sources.source1.command = /usr/bin/vmstat 1
tier1.sources.source1.channels = channel1

tier1.channels.channel1.type = memory
tier1.channels.channel1.capacity = 10000
tier1.channels.channel1.transactionCapacity = 1000

tier1.sinks.sink1.type = org.apache.flume.sink.kafka.KafkaSink
tier1.sinks.sink1.topic = sink1
tier1.sinks.sink1.brokerList = kafka01.example.com:9092,kafka02.example.com:9092
tier1.sinks.sink1.channel = channel1
tier1.sinks.sink1.batchSize = 20

```

For the list of Kafka Sink properties, see [Kafka Sink Properties](#).

For the full list of Kafka producer properties, see the [Kafka documentation](#).

The Kafka sink uses the `topic` and `key` properties from the FlumeEvent headers to determine where to send events in Kafka. If the header contains the `topic` property, that event is sent to the designated topic, overriding the configured topic. If the header contains the `key` property, that key is used to partition events within the topic. Events with the same key are sent to the same partition. If the `key` parameter is not specified, events are distributed randomly to partitions. Use these properties to control the topics and partitions to which events are sent through the Flume source or interceptor.

### Kafka Channel

CDH 5.3 and higher includes a Kafka channel to Flume in addition to the existing memory and file channels. You can use the Kafka channel:

- To write to Hadoop directly from Kafka without using a source.
- To write to Kafka directly from Flume sources without additional buffering.
- As a reliable and highly available channel for any source/sink combination.

The following Flume configuration uses a Kafka channel with an `exec` source and `hdfs` sink:

```
tier1.sources = source1
tier1.channels = channel1
tier1.sinks = sink1

tier1.sources.source1.type = exec
tier1.sources.source1.command = /usr/bin/vmstat 1
tier1.sources.source1.channels = channel1

tier1.channels.channel1.type = org.apache.flume.channel.kafka.KafkaChannel
tier1.channels.channel1.capacity = 10000
tier1.channels.channel1.zookeeperConnect = zk01.example.com:2181
tier1.channels.channel1.parseAsFlumeEvent = false
tier1.channels.channel1.kafka.topic = channel2
tier1.channels.channel1.kafka.consumer.group.id = channel2-grp
tier1.channels.channel1.kafka.consumer.auto.offset.reset = earliest
tier1.channels.channel1.kafka.bootstrap.servers =
kafka02.example.com:9092,kafka03.example.com:9092
tier1.channels.channel1.transactionCapacity = 1000
tier1.channels.channel1.kafka.consumer.max.partition.fetch.bytes=2097152

tier1.sinks.sink1.type = hdfs
tier1.sinks.sink1.hdfs.path = /tmp/kafka/channel
tier1.sinks.sink1.hdfs.rollInterval = 5
tier1.sinks.sink1.hdfs.rollSize = 0
tier1.sinks.sink1.hdfs.rollCount = 0
tier1.sinks.sink1.hdfs.fileType = DataStream
tier1.sinks.sink1.channel = channel1
```

For the list of Kafka Channel properties, see [Kafka Channel Properties](#).

For the full list of Kafka producer properties, see the [Kafka documentation](#).

## Additional Considerations When Using Apache Kafka

When using Apache Kafka, consider the following:

- Use Cloudera Manager to start and stop Kafka and ZooKeeper services. Do not use the `kafka-server-start`, `kafka-server-stop`, `zookeeper-server-start`, and `zookeeper-server-stop` commands.
- All Kafka command-line tools are located in `/opt/cloudera/parcels/KAFKA/lib/kafka/bin/`.
- Ensure that the `JAVA_HOME` environment variable is set to your JDK installation directory before using the command-line tools. For example:

```
export JAVA_HOME=/usr/java/jdk1.7.0_55-cloudera
```



See the [Apache Kafka documentation](#).

See the [Apache Kafka FAQ](#).

# Apache Kafka Administration

This section describes ways to configure and manage Apache Kafka, including performance tuning and high availability considerations.

## Configuring Apache Kafka Security

This topic describes additional steps you can take to ensure the safety and integrity of your data stored in Apache Kafka, with features available in CDK 2.0.0 and higher Powered By Apache Kafka:

### Deploying SSL for Kafka

Kafka allows clients to connect over SSL. By default, SSL is disabled, but can be turned on as needed.

#### Step 1. Generating Keys and Certificates for Kafka Brokers

First, generate the key and the certificate for each machine in the cluster using the Java keytool utility. See [Creating Certificates](#).

*keystore* is the keystore file that stores your certificate. *validity* is the valid time of the certificate in days.

```
$ keytool -keystore {tmp.server.keystore.jks} -alias localhost -validity {validity}
-genkey
```

Make sure that the common name (CN) matches the fully qualified domain name (FQDN) of your server. The client compares the CN with the DNS domain name to ensure that it is connecting to the correct server.

#### Step 2. Creating Your Own Certificate Authority

You have generated a public-private key pair for each machine, and a certificate to identify the machine. However, the certificate is unsigned, so an attacker can create a certificate and pretend to be any machine. Sign certificates for each machine in the cluster to prevent unauthorized access.

A Certificate Authority (CA) is responsible for signing certificates. A CA is similar to a government that issues passports. A government stamps (signs) each passport so that the passport becomes difficult to forge. Similarly, the CA signs the certificates, and the cryptography guarantees that a signed certificate is computationally difficult to forge. If the CA is a genuine and trusted authority, the clients have high assurance that they are connecting to the authentic machines.

```
openssl req -new -x509 -keyout ca-key -out ca-cert -days 365
```

The generated CA is a public-private key pair and certificate used to sign other certificates.

Add the generated CA to the client truststores so that clients can trust this CA:

```
keytool -keystore {client.truststore.jks} -alias CARoot -import -file {ca-cert}
```



**Note:** If you configure Kafka brokers to require client authentication by setting `ssl.client.auth` to be requested or required on the [Kafka brokers config](#), you must provide a truststore for the Kafka brokers as well. The truststore should have all the CA certificates by which the clients keys are signed.

The keystore created in step 1 stores each machine's own identity. In contrast, the truststore of a client stores all the certificates that the client should trust. Importing a certificate into a truststore means trusting all certificates that are signed by that certificate. This attribute is called the *chain of trust*. It is particularly useful when deploying SSL on a large Kafka cluster. You can sign all certificates in the cluster with a single CA, and have all machines share the same truststore that trusts the CA. That way, all machines can authenticate all other machines.

### Step 3. Signing the certificate

Now you can sign all certificates generated by step 1 with the CA generated in step 2.

1. Export the certificate from the keystore:

```
keytool -keystore server.keystore.jks -alias localhost -certreq -file cert-file
```

2. Sign it with the CA:

```
openssl x509 -req -CA ca-cert -CAkey ca-key -in cert-file -out cert-signed -days {validity} -CAcreateserial -passin pass:{ca-password}
```

3. Import both the certificate of the CA and the signed certificate into the keystore:

```
keytool -keystore server.keystore.jks -alias CARoot -import -file ca-cert keytool -keystore server.keystore.jks -alias localhost -import -file cert-signed
```

The definitions of the variables are as follows:

- *keystore*: the location of the keystore
- *ca-cert*: the certificate of the CA
- *ca-key*: the private key of the CA
- *ca-password*: the passphrase of the CA
- *cert-file*: the exported, unsigned certificate of the server
- *cert-signed*: the signed certificate of the server

The following Bash script demonstrates the steps described above. One of the commands assumes a password of test1234, so either use that password or edit the command before running it.

```
#!/bin/bash
#Step 1
keytool -keystore server.keystore.jks -alias localhost -validity 365 -genkey
#Step 2
openssl req -new -x509 -keyout ca-key -out ca-cert -days 365
keytool -keystore server.truststore.jks -alias CARoot -import -file ca-cert
keytool -keystore client.truststore.jks -alias CARoot -import -file ca-cert
#Step 3
keytool -keystore server.keystore.jks -alias localhost -certreq -file cert-file
openssl x509 -req -CA ca-cert -CAkey ca-key -in cert-file -out cert-signed -days 365 -CAcreateserial -passin pass:test1234
keytool -keystore server.keystore.jks -alias CARoot -import -file ca-cert
keytool -keystore server.keystore.jks -alias localhost -import -file cert-signed
```

### Step 4. Configuring Kafka Brokers

Kafka Brokers support listening for connections on multiple ports. If SSL is enabled for inter-broker communication (see below for how to enable it), both PLAINTEXT and SSL ports are required.

To configure the listeners from Cloudera Manager, perform the following steps:

1. In Cloudera Manager, click Kafka > Instances, and then click on "Kafka Broker" > Configurations > Kafka Broker Advanced Configuration Snippet (Safety Valve) for kafka.properties. Enter the following information:

```
listeners=PLAINTEXT://<kafka-broker-host-name>:9092,SSL://<kafka-broker-host-name>:9093
advertised.listeners=PLAINTEXT://<kafka-broker-host-name>:9092,SSL://<kafka-broker-host-name>:9093
```

where `kafka-broker-host-name` is the FQDN of the broker that you selected from the Instances page Cloudera Manager. In the above sample configurations we used PLAINTEXT and SSL protocols for the SSL enabled brokers. For information about other supported security protocols, see [Using Kafka Supported Protocols](#)

2. Repeat the above step for all the brokers. The `advertised.listeners` configuration above is needed to connect the brokers from external clients.

### 3. Deploy the above client configurations and rolling restart the Kafka service from Cloudera Manager.

Kafka CSD auto-generates listeners for Kafka brokers, depending on your SSL and Kerberos configuration. To enable SSL for Kafka installations, do the following:

1. Turn on SSL for the Kafka service by turning on the `ssl_enabled` configuration for the Kafka CSD.
2. Set `security.inter.broker.protocol` as `SSL`, if Kerberos is disabled; otherwise, set it as `SASL_SSL`.

The following SSL configurations are required on each broker. Each of these values can be set in Cloudera Manager. See [Modifying Configuration Properties Using Cloudera Manager](#):

```
ssl.keystore.location=/var/private/ssl/kafka.server.keystore.jks
ssl.keystore.password=test1234
ssl.key.password=test1234
ssl.truststore.location=/var/private/ssl/kafka.server.truststore.jks
ssl.truststore.password=test1234
```

Other configuration settings might also be needed, depending on your requirements:

- `ssl.client.auth=none`: Other options for client authentication are `required`, or `requested`, where clients without certificates can still connect. The use of `requested` is discouraged, as it provides a false sense of security and misconfigured clients can still connect.
- `ssl.cipher.suites`: A cipher suite is a named combination of authentication, encryption, MAC, and a key exchange algorithm used to negotiate the security settings for a network connection using TLS or SSL network protocol. This list is empty by default.
- `ssl.enabled.protocols=TLSv1.2,TLSv1.1,TLSv1`: Provide a list of SSL protocols that your brokers accept from clients.
- `ssl.keystore.type=JKS`
- `ssl.truststore.type=JKS`

To enable SSL for inter-broker communication, add the following line to the broker properties file. The default value is `PLAINTEXT`. See [Using Kafka Supported Protocols](#) on page 45.

```
security.inter.broker.protocol=SSL
```

Due to import regulations in some countries, the Oracle implementation limits the strength of cryptographic algorithms available by default. If you need stronger algorithms (for example, AES with 256-bit keys), you must obtain the [JCE Unlimited Strength Jurisdiction Policy Files](#) and install them in the JDK/JRE. For more information, see the [JCA Providers Documentation](#).

Once you start the broker, you should see the following message in the server.log:

```
with addresses: PLAINTEXT -> EndPoint(192.168.64.1,9092,PLAINTEXT),SSL ->
EndPoint(192.168.64.1,9093,SSL)
```

To check whether the server keystore and truststore are set up properly, run the following command:

```
openssl s_client -debug -connect localhost:9093 -tls1
```



**Note:** TLSv1 should be listed under `ssl.enabled.protocols`.

In the output of this command, you should see the server certificate:

```
-----BEGIN CERTIFICATE-----
{variable sized random bytes}
-----END CERTIFICATE-----
subject=/C=US/ST=CA/L=Santa Clara/O=org/OU=org/CN=John Smith
issuer=/C=US/ST=CA/L=Santa Clara/O=org/OU=org/CN=kafka/emailAddress=test@test.com
```

If the certificate does not appear, or if there are any other error messages, your keystore is not set up properly.

### Step 5. Configuring Kafka Clients

SSL is supported only for the new Kafka Producer and Consumer APIs. The configurations for SSL are the same for both the producer and consumer.

If client authentication is not required in the broker, the following shows a minimal configuration example:

```
security.protocol=SSL
ssl.truststore.location=/var/private/ssl/kafka.client.truststore.jks
ssl.truststore.password=test1234
```

If client authentication is required, a keystore must be created as in step 1, and you must also configure the following properties:

```
ssl.keystore.location=/var/private/ssl/kafka.client.keystore.jks
ssl.keystore.password=test1234
ssl.key.password=test1234
```

Other configuration settings might also be needed, depending on your requirements and the broker configuration:

- `ssl.provider` (Optional). The name of the security provider used for SSL connections. Default is the default security provider of the JVM.
- `ssl.cipher.suites` (Optional). A cipher suite is a named combination of authentication, encryption, MAC, and a key exchange algorithm used to negotiate the security settings for a network connection using TLS or SSL network protocol.
- `ssl.enabled.protocols=TLSv1.2,TLSv1.1,TLSv1`. This property should list at least one of the protocols configured on the broker side
- `ssl.truststore.type=JKS`
- `ssl.keystore.type=JKS`

## Using Kafka Supported Protocols

Kafka can expose multiple communication endpoints, each supporting a different protocol. Supporting multiple communication endpoints enables you to use different communication protocols for client-to-broker communications and broker-to-broker communications. Set the Kafka inter-broker communication protocol using the `security.inter.broker.protocol` property. Use this property primarily for the following scenarios:

- Enabling SSL encryption for client-broker communication but keeping broker-broker communication as PLAINTEXT. Because SSL has performance overhead, you might want to keep inter-broker communication as PLAINTEXT if your Kafka brokers are behind a firewall and not susceptible to network snooping.
- Migrating from a non-secure Kafka configuration to a secure Kafka configuration without requiring downtime. Use a rolling restart and keep `security.inter.broker.protocol` set to a protocol that is supported by all brokers until all brokers are updated to support the new protocol.

For example, if you have a Kafka cluster that needs to be configured to enable Kerberos without downtime, follow these steps:

1. Set `security.inter.broker.protocol` to PLAINTEXT.
2. Update the Kafka service configuration to enable Kerberos.
3. Perform a rolling restart.
4. Set `security.inter.broker.protocol` to SASL\_PLAINTEXT.

CDK 2.0 and higher Powered By Apache Kafka supports the following combinations of protocols.

	SSL	Kerberos
PLAINTEXT	No	No
SSL	Yes	No

	SSL	Kerberos
SASL_PLAINTEXT	No	Yes
SASL_SSL	Yes	Yes

These protocols can be defined for broker-to-client interaction and for broker-to-broker interaction. `security.inter.broker.protocol` allows the broker-to-broker communication protocol to be different than the broker-to-client protocol. It was added to ease the upgrade from non-secure to secure clusters while allowing rolling upgrades.

In most cases, set `security.inter.broker.protocol` to the protocol you are using for broker-to-client communication. Set `security.inter.broker.protocol` to a protocol different than the broker-to-client protocol only when you are performing a rolling upgrade from a non-secure to a secure Kafka cluster.

### Enabling Kerberos Authentication

CDK 2.0 and higher Powered By Apache Kafka supports Kerberos authentication. If you already have a Kerberos server, you can add Kafka to your current configuration. If you do not have a Kerberos server, install it before proceeding. See [Enabling Kerberos Authentication Using the Wizard](#).

If you already have configured the mapping from Kerberos principals to short names using the `hadoop.security.auth_to_local` HDFS configuration property, configure the same rules for Kafka by adding the `sasl.kerberos.principal.to.local.rules` property to the Advanced Configuration Snippet for `Kafka Broker` Advanced Configuration Snippet using Cloudera Manager. Specify the rules as a comma separated list.

To enable Kerberos authentication for Kafka:

1. From Cloudera Manager, navigate to **Kafka > Configurations**. Set SSL client authentication to none. Set **Inter Broker Protocol** to `SASL_PLAINTEXT`.
2. Click **Save Changes**.
3. Restart the Kafka service.
4. Make sure that `listeners = SASL_PLAINTEXT` is present in the Kafka broker logs `/var/log/kafka/server.log`.
5. Create a `jaas.conf` file with the following contents to use with cached Kerberos credentials (you can modify this to use keytab files instead of cached credentials. To generate keytabs, see [Step 6: Get or Create a Kerberos Principal for Each User Account](#)).

If you use kinit first, use this configuration.

```
KafkaClient {
  com.sun.security.auth.module.Krb5LoginModule required
  useTicketCache=true;
};
```

If you use keytab, use this configuration:

```
KafkaClient {
  com.sun.security.auth.module.Krb5LoginModule required
  useKeyTab=true
  keyTab="/etc/security/keytabs/kafka_server.keytab"
  principal="kafka/kafkal.hostname.com@EXAMPLE.COM";
};
```

6. Create the `client.properties` file containing the following properties.

```
security.protocol=SASL_PLAINTEXT
sasl.kerberos.service.name=kafka
```

7. Test with the Kafka console producer and consumer. To obtain a Kerberos ticket-granting ticket (TGT):

```
$ kinit <user>
```

8. Verify that your topic exists. (This does not use security features, but it is a best practice.)

```
$ kafka-topics --list --zookeeper <zookeeper>:2181
```

9. Verify that the `jaas.conf` file is used by setting the environment.

```
$ export KAFKA_OPTS="-Djava.security.auth.login.config=/home/user/jaas.conf"
```

10. Run a Kafka console producer.

```
$ kafka-console-producer --broker-list <anybroker>:9092 --topic test1
--producer.config client.properties
```

11. Run a Kafka console consumer.

```
$ kafka-console-consumer --new-consumer --topic test1 --from-beginning
--bootstrap-server <anybroker>:9092 --consumer.config client.properties
```

## Enabling Encryption at Rest

Data encryption is increasingly recognized as an optimal method for protecting [data at rest](#).

Perform the following steps to encrypt Kafka data that is not in active use.

1. [Stop the Kafka service](#).
2. Archive the Kafka data to an alternate location, using TAR or another archive tool.
3. Unmount the affected drives.
4. Install and configure [Navigator Encrypt](#).
5. Expand the TAR archive into the encrypted directories.

## Using Kafka with Sentry Authorization

Starting with CDK 2.1.x on CDH 5.9.x and higher Powered By Apache Kafka, Apache Sentry includes Kafka binding you can use to enable authorization in Kafka with Sentry. For more information, see [Authorization With Apache Sentry](#).

### Configuring Kafka to Use Sentry Authorization

The following steps describe how to configure Kafka to use Sentry authorization. These steps assume you have installed Kafka and Sentry on your cluster.

Sentry requires that your cluster include HDFS. After you install and start Sentry with the correct configuration, you can stop the HDFS service.



**Note:** CDK Powered By Apache Kafka can make use of LDAP-based user groups when the LDAP directory is synchronized to Linux via tools such as SSSD. CDK Powered By Apache Kafka does not support direct integration with LDAP, either through direct Kafka LDAP authentication, or via Hadoop's group mapping (when `hadoop.group.mapping` is set to `LdapGroupMapping`). For more information, see [Configuring LDAP Group Mappings](#).

For more information, see [Installing or Upgrading CDK Powered By Apache Kafka®](#) on page 31 and [Installing and Upgrading the Sentry Service](#).

To configure Sentry authentication for Kafka:

1. Go to **Kafka > Configuration**.

2. Select the checkbox **Enable Kerberos Authentication**.
3. Select a Sentry service in the Kafka service configuration.
4. Add **Super users**. Super users can perform any action on any resource in the Kafka cluster. The `kafka` user is added as a super user by default. Super user requests are authorized without going through Sentry, which provides enhanced performance.
5. Select the checkbox **Enable Sentry Privileges Caching** to enhance performance.

### Authorizable Resources

Authorizable resources are resources or entities in a Kafka cluster that require special permissions for a user to be able to perform actions on them. Kafka has four authorizable resources.

- **Cluster**, which controls who can perform cluster-level operations such as creating or deleting a topic. This can only have one value, `kafka-cluster`, as one Kafka cluster cannot have more than one cluster resource.
- **Topic**, which controls who can perform topic-level operations such as producing and consuming topics. Its value must match exactly the topic name in the Kafka cluster.
- **Consumergroup**, which controls who can perform consumergroup-level operations such as joining or describing a consumergroup. Its value must exactly match the `group.id` of a consumergroup.
- **Host**, which controls from where specific operations can be performed. Think of this as a way to achieve IP filtering in Kafka. You can set the value of this resource to the wildcard (`*`), which represents all hosts.



**Note:** Only IP addresses should be specified in the host component of Kafka Sentry privileges, hostnames are not supported.

### Authorized Actions

You can perform multiple actions on each resource. The following operations are supported by Kafka, though not all actions are valid on all resources.

- ALL, this is a wildcard action, and represents all possible actions on a resource.
- read
- write
- create
- delete
- alter
- describe
- clusteraction

### Authorizing Privileges

Privileges define what actions are allowed on a resource. A privilege is represented as a string in Sentry. The following rules apply to a valid privilege.

- Can have at most one Host resource. If you do not specify a Host resource in your privilege string, `Host=*` is assumed.
- Must have exactly one non-Host resource.
- Must have exactly one action specified at the end of the privilege string.

For example, the following are valid privilege strings:

```
Host=*->Topic=myTopic->action=ALL
Topic=test->action=ALL
```

### Granting Privileges to a Role

The following examples grant privileges to the role `test`, so that users in `testGroup` can create a topic named `testTopic` and produce to it.



The user executing these commands must be added to the Sentry parameter `sentry.service.allow.connect` and also be a member of a group defined in `sentry.service.admin.group`.

Before you can assign the `test` role, you must first create it. To create the `test` role:

```
$kafka-sentry -cr -r test
```

To confirm that the role was created, list the roles:

```
$ kafka-sentry -lr
```

If Sentry privileges caching is enabled, as recommended, the new privileges you assign take some time to appear in the system. The `time` is the time-to-live interval of the Sentry privileges cache, which is set using `sentry.kafka.caching.ttl.ms`. By default, this interval is set to 30 seconds. For test clusters, it is beneficial to have changes appear within the system as fast as possible, therefore, Cloudera recommends that you either use a lower time interval, or disable caching with `sentry.kafka.caching.enable`.

- Allow users in `testGroup` to write to `testTopic` from localhost, which allows users to produce to `testTopic`. They need both write and describe permissions.

```
$ kafka-sentry -gpr -r test -p "Host=127.0.0.1->Topic=testTopic->action=write"
$ kafka-sentry -gpr -r test -p "Host=127.0.0.1->Topic=testTopic->action=describe"
```

- Assign the `test` role to the group `testGroup`:

```
kafka-sentry -arg -r test -g testGroup
```

- Verify that the `test` role is part of the group `testGroup`:

```
kafka-sentry -lr -g testGroup
```

- Create `testTopic`.

```
$ kafka-topics --create --zookeeper localhost:2181 --replication-factor 1 \
  --partitions 1 --topic testTopic
$ kafka-topics --list --zookeeper localhost:2181 testTopic
```

- Produce to `testTopic`. Note that you have to pass a configuration file, `producer.properties`, with information on JAAS configuration and other Kerberos authentication related information. See [SASL Configuration for Kafka Clients](#).

```
$ kafka-console-producer --broker-list localhost:9092 --topic testTopic \
  --producer.config producer.properties
This is a message
This is another message
```

- Grant the `create` privilege to the `test` role.

```
$ kafka-sentry -gpr -r test -p "Host=127.0.0.1->Cluster=kafka-cluster->action=create"
```

- Allow users in `testGroup` to describe `testTopic` from localhost, which the user creates and uses.

```
$ kafka-sentry -gpr -r test -p "Host=127.0.0.1->Topic=testTopic->action=describe"
```

- Grant the `describe` privilege to the `test` role.

```
$ kafka-sentry -gpr -r test -p
"Host=127.0.0.1->Consumergroup=testconsumergroup->action=describe"
```

- Allow users in `testGroup` to read from a consumer group, `testconsumergroup`, that it will start and join.

```
$ kafka-sentry -gpr -r test -p  
"Host=127.0.0.1->Consumergroup=testconsumergroup->action=read"
```

- Allow users in `testGroup` to read from `testTopic` from localhost and to consume from `testTopic`.

```
$ kafka-sentry -gpr -r test -p "Host=127.0.0.1->Topic=testTopic->action=read"
```

- Consume from `testTopic`. Note that you have to pass a configuration file, `consumer.properties`, with information on JAAS configuration and other Kerberos authentication related information. The configuration file must also specify `group.id` as `testconsumergroup`.

```
kafka-console-consumer --new-consumer --topic test1 --from-beginning --bootstrap-server  
<anybroker>:9092 --consumer.config consumer.properties  
This is a message  
This is another message
```

### Troubleshooting

If Kafka requests are failing due to authorization, the following steps can provide insight into the error:

- Make sure you are kinit'd as a user who has privileges to perform an operation.
- Identify which broker is hosting leader of the partition you are trying to produce to or consume from, as this leader is going to authorize your request against Sentry. One easy way of debugging is to just have one Kafka broker. Change log level of the Kafka broker to debug and restart the broker.
- Run the Kafka client or Kafka CLI with required arguments and capture the Kafka log, which should be something like `/var/log/kafka/kafka-broker-<HOST_ID>.log` on kafka broker's host.
- There will be many Jetty logs, and filtering that out usually helps in reducing noise. Look for log messages from `org.apache.sentry`.
- Look for following information in the filtered logs:
  - Groups the user Kafka client or CLI is running as.
  - Required privileges for the operation.
  - Retrieved privileges from Sentry.
  - Required and retrieved privileges comparison result.

This log information can provide insight into which privilege is not assigned to a user, causing a particular operation to fail.

## Configuring High Availability and Consistency for Apache Kafka

To achieve high availability and consistency targets, adjust the following parameters to meet your requirements:

### Replication Factor

The default replication factor for new topics is one. For high availability production systems, Cloudera recommends setting the replication factor to at least three. This requires at least three Kafka brokers.

To change the replication factor, navigate to **Kafka Service > Configuration > Service-Wide**. Set **Replication factor** to 3, click **Save Changes**, and restart the Kafka service.

### Preferred Leader Election

Kafka is designed with failure in mind. At some point in time, web communications or storage resources fail. When a broker goes offline, one of the replicas becomes the new leader for the partition. When the broker comes back online, it has no leader partitions. Kafka keeps track of which machine is configured to be the leader. Once the original broker

is back up and in a good state, Kafka restores the information it missed in the interim and makes it the partition leader once more.

Preferred Leader Election is enabled by default, and should occur automatically unless you actively disable the feature. Typically, the leader is restored within five minutes of coming back online. If the preferred leader is offline for a very long time, though, it might need additional time to restore its required information from the replica.

There is a small possibility that some messages might be lost when switching back to the preferred leader. You can minimize the chance of lost data by setting the `acks` property on the Producer to `all`. See [Acknowledgements](#) on page 51.

### Unclean Leader Election

Enable unclean leader election to allow an out-of-sync replica to become the leader and preserve the availability of the partition. With unclean leader election, messages that were not synced to the new leader are lost. This provides balance between consistency (guaranteed message delivery) and availability. With unclean leader election disabled, if a broker containing the leader replica for a partition becomes unavailable, and no in-sync replica exists to replace it, the partition becomes unavailable until the leader replica or another in-sync replica is back online.

To enable unclean leader election, navigate to **Kafka Service > Configuration > Service-Wide**. Check the box labeled **Enable unclean leader election**, click **Save Changes**, and restart the Kafka service.

### Acknowledgements

When writing or configuring a Kafka producer, you can choose how many replicas commit a new message before the message is acknowledged using the `acks` property.

Set `acks` to `0` (immediately acknowledge the message without waiting for any brokers to commit), `1` (acknowledge after the leader commits the message), or `all` (acknowledge after all in-sync replicas are committed) according to your requirements. Setting `acks` to `all` provides the highest consistency guarantee at the expense of slower writes to the cluster.

### Minimum In-sync Replicas

You can set the minimum number of in-sync replicas (ISRs) that must be available for the producer to successfully send messages to a partition using the `min.insync.replicas` setting. If `min.insync.replicas` is set to `2` and `acks` is set to `all`, each message must be written successfully to at least two replicas. This guarantees that the message is not lost unless both hosts crash.

It also means that if one of the hosts crashes, the partition is no longer available for writes. Similar to the unclean leader election configuration, setting `min.insync.replicas` is a balance between higher consistency (requiring writes to more than one broker) and higher availability (allowing writes when fewer brokers are available).

The leader is considered one of the in-sync replicas. It is included in the count of total `min.insync.replicas`. However, leaders are special, in that producers and consumers can only interact with leaders in a Kafka cluster.

To configure `min.insync.replicas` at the cluster level, navigate to **Kafka Service > Configuration > Service-Wide**. Set **Minimum number of replicas in ISR** to the desired value, click **Save Changes**, and restart the Kafka service.

To set this parameter on a per-topic basis, navigate to **Kafka Service > Configuration > Kafka broker Default Group > Advanced**, and add the following to the **Kafka Broker Advanced Configuration Snippet (Safety Valve) for kafka.properties**:

```
min.insync.replicas.per.topic=topic_name_1:value,topic_name_2:value
```

Replace `topic_name_n` with the topic names, and replace `value` with the desired minimum number of in-sync replicas.

You can also set this parameter using the `/usr/bin/kafka-topics --alter` command for each topic. For example:

```
/usr/bin/kafka-topics --alter --zookeeper zk01.example.com:2181 --topic topicname \
--config min.insync.replicas=2
```

### Kafka MirrorMaker

Kafka mirroring enables maintaining a replica of an existing Kafka cluster. You can configure MirrorMaker directly in Cloudera Manager 5.4 and higher.

The most important configuration setting is **Destination broker list**. This is a list of brokers on the destination cluster. You should list more than one, to support high availability, but you do not need to list all brokers.

MirrorMaker requires that you specify a **Topic whitelist** that represents the exclusive set of topics to replicate. The **Topic blacklist** setting has been removed in CDK 2.0 and higher Powered By Apache Kafka.



**Note:** The **Avoid Data Loss** option from earlier releases has been removed in favor of automatically setting the following properties. Also note that MirrorMaker starts correctly if you enter the numeric values in the configuration snippet (rather than using "max integer" for `retries` and "max long" for `max.block.ms`).

#### 1. Producer settings

- `acks=all`
- `retries=2147483647`
- `max.block.ms=9223372036854775807`

#### 2. Consumer setting

- `auto.commit.enable=false`

#### 3. MirrorMaker setting

- `abort.on.send.failure=true`

## Configuring Apache Kafka for Performance and Resource Management

Apache Kafka is optimized for small messages. [According to benchmarks](#), the best performance occurs with 1 KB messages. Larger messages (for example, 10 MB to 100 MB) can decrease throughput and significantly impact operations.

This topic describes options that can improve performance and reliability in your Kafka cluster:

### Partitions and Memory Usage

For a quick video introduction to load balancing, see [tl;dr: Balancing Apache Kafka Clusters](#).

Brokers allocate a buffer the size of `replica.fetch.max.bytes` for each partition they replicate. If `replica.fetch.max.bytes` is set to 1 MiB, and you have 1000 partitions, about 1 GiB of RAM is required. Ensure that the number of partitions multiplied by the size of the largest message does not exceed available memory.

The same consideration applies for the consumer `fetch.message.max.bytes` setting. Ensure that you have enough memory for the largest message for each partition the consumer replicates. With larger messages, you might need to use fewer partitions or provide more RAM.

#### Partition Reassignment

At some point you will likely exceed configured resources on your system. If you add a Kafka broker to your cluster to handle increased demand, new partitions are allocated to it (the same as any other broker), but it does not automatically share the load of existing partitions on other brokers. To redistribute the existing load among brokers, you must manually reassign partitions. You can do so using `bin/kafka-reassign-partitions.sh` script utilities.

To reassign partitions:

1. Create a list of topics you want to move.

```
topics-to-move.json
{"topics": [{"topic": "foo1"},
            {"topic": "foo2"}],
  "version":1
}
```

2. Use the `--generate` option in `kafka-reassign-partitions.sh` to list the distribution of partitions and replicas on your current brokers, followed by a list of suggested locations for partitions on your new broker.

```
bin/kafka-reassign-partitions.sh --zookeeper localhost:2181
  --topics-to-move-json-file topics-to-move.json
  --broker-list "4"
  --generate

Current partition replica assignment

{"version":1,
  "partitions":[{"topic":"foo1","partition":2,"replicas":[1,2]},
               {"topic":"foo1","partition":0,"replicas":[3,1]},
               {"topic":"foo2","partition":2,"replicas":[1,2]},
               {"topic":"foo2","partition":0,"replicas":[3,2]},
               {"topic":"foo1","partition":1,"replicas":[2,3]},
               {"topic":"foo2","partition":1,"replicas":[2,3]}]}

{"version":1,
  "partitions":[{"topic":"foo1","partition":3,"replicas":[4]},
               {"topic":"foo1","partition":1,"replicas":[4]},
               {"topic":"foo2","partition":2,"replicas":[4]}]}

}
```

3. Revise the suggested list if required, and then save it as a JSON file.
4. Use the `--execute` option in `kafka-reassign-partitions.sh` to start the redistribution process, which can take several hours in some cases.

```
> bin/kafka-reassign-partitions.sh \
  --zookeeper localhost:2181 \
  --reassignment-json-file expand-cluster-reassignment.json
  --execute
```

5. Use the `--verify` option in `kafka-reassign-partitions.sh` to check the status of your partitions.

Although reassigning partitions is labor-intensive, you should anticipate system growth and redistribute the load when your system is at 70% capacity. If you wait until you are forced to redistribute because you have reached the limit of your resources, the redistribution process can be extremely slow.

## Garbage Collection

Large messages can cause longer garbage collection (GC) pauses as brokers allocate large chunks. Monitor the GC log and the server log. If long GC pauses cause Kafka to abandon the ZooKeeper session, you may need to configure longer timeout values for `zookeeper.session.timeout.ms`.

## Handling Large Messages

Before configuring Kafka to handle large messages, first consider the following options to reduce message size:

- The Kafka producer can compress messages. For example, if the original message is a text-based format (such as XML), in most cases the compressed message will be sufficiently small.

Use the `compression.codec` and `compressed.topics` producer configuration parameters to enable compression. Gzip and Snappy are supported.

- If shared storage (such as NAS, HDFS, or S3) is available, consider placing large files on the shared storage and using Kafka to send a message with the file location. In many cases, this can be much faster than using Kafka to send the large file itself.
- Split large messages into 1 KB segments with the producing client, using partition keys to ensure that all segments are sent to the same Kafka partition in the correct order. The consuming client can then reconstruct the original large message.

If you still need to send large messages with Kafka, modify the configuration parameters presented in the following sections to match your requirements.

Broker Configuration

**Table 7: Broker Configuration Properties**

Property	Default Value	Description
<code>message.max.bytes</code>	1000000 (1 MB)	Maximum message size the broker accepts. When using the old consumer, this property must be lower than the consumer <code>fetch.message.max.bytes</code> , or the consumer cannot consume the message.
<code>log.segment.bytes</code>	1073741824 (1 GiB)	Size of a Kafka data file. Must be larger than any single message.
<code>replica.fetch.max.bytes</code>	1048576 (1 MiB)	Maximum message size a broker can replicate. Must be larger than <code>message.max.bytes</code> , or a broker can accept messages it cannot replicate, potentially resulting in data loss.

Consumer Configuration

Kafka offers two separate consumer implementations, the old consumer and the new consumer. The old consumer is the `Consumer` class written in Scala. The new consumer is the `KafkaConsumer` class written in Java. When configuring Kafka to handle large messages, different properties have to be configured for each consumer implementation.

**Old Consumer**

**Table 8: Old Consumer Configuration Properties**

Property	Default Value	Description
<code>fetch.message.max.bytes</code>	52428800 (50 MiB)	The maximum amount of data the server should return for a fetch request. This is a hard limit. If a message batch is larger than this limit, the consumer will not be able to consume the message or any subsequent messages in a given partition.

**New Consumer**

**Table 9: New Consumer Configuration Properties**

Property	Default Value	Description
<code>max.partition.fetch.bytes</code>	1048576 (10 MiB)	The maximum amount of data per-partition the server will return.
<code>fetch.max.bytes</code>	52428800 (50 MiB)	The maximum amount of data the server should return for a fetch request.



**Note:** The new consumer is able to consume a message batch that is larger than the default value of the `max.partition.fetch.bytes` or `fetch.max.bytes` property. However, the batch will be sent alone, which can cause performance degradation.

## Tuning Kafka for Optimal Performance

For a quick video introduction to tuning Kafka, see [tldr: Tuning Your Apache Kafka Cluster](#).

Performance tuning involves two important metrics: *Latency* measures how long it takes to process one event, and *throughput* measures how many events arrive within a specific amount of time. Most systems are optimized for either latency or throughput. Kafka is balanced for both. A well tuned Kafka system has just enough brokers to handle topic throughput, given the latency required to process information as it is received.

Tuning your producers, brokers, and consumers to send, process, and receive the largest possible batches within a manageable amount of time results in the best balance of latency and throughput for your Kafka cluster.

### Tuning Kafka Producers

Kafka uses an asynchronous publish/subscribe model. When your producer calls the `send()` command, the result returned is a *future*. The future provides methods to let you check the status of the information in process. When the batch is ready, the producer sends it to the broker. The Kafka broker waits for an event, receives the result, and then responds that the transaction is complete.

If you do not use a future, you could get just one record, wait for the result, and then send a response. Latency is very low, but so is throughput. If each transaction takes 5 ms, throughput is 200 events per second.—slower than the expected 100,000 events per second.

When you use `Producer.send()`, you fill up buffers on the producer. When a buffer is full, the producer sends the buffer to the Kafka broker and begins to refill the buffer.

Two parameters are particularly important for latency and throughput: batch size and linger time.

#### Batch Size

`batch.size` measures batch size in total bytes instead of the number of messages. It controls how many bytes of data to collect before sending messages to the Kafka broker. Set this as high as possible, without exceeding available memory. The default value is 16384.

If you increase the size of your buffer, it might never get full. The Producer sends the information eventually, based on other triggers, such as linger time in milliseconds. Although you can impair memory usage by setting the buffer batch size too high, this does not impact latency.

If your producer is sending all the time, you are probably getting the best throughput possible. If the producer is often idle, you might not be writing enough data to warrant the current allocation of resources.

#### Linger Time

`linger.ms` sets the maximum time to buffer data in asynchronous mode. For example, a setting of 100 batches 100ms of messages to send at once. This improves throughput, but the buffering adds message delivery latency.

By default, the producer does not wait. It sends the buffer any time data is available.

Instead of sending immediately, you can set `linger.ms` to 5 and send more messages in one batch. This would reduce the number of requests sent, but would add up to 5 milliseconds of latency to records sent, even if the load on the system does not warrant the delay.

The farther away the broker is from the producer, the more overhead required to send messages. Increase `linger.ms` for higher latency and higher throughput in your producer.

### Tuning Kafka Brokers

Topics are divided into partitions. Each partition has a leader. Most partitions are written into leaders with multiple replicas. When the leaders are not balanced properly, one might be overworked, compared to others. For more information on load balancing, see [Partitions and Memory Usage](#).

Depending on your system and how critical your data is, you want to be sure that you have sufficient replication sets to preserve your data. Cloudera recommends starting with one partition per physical storage disk and one consumer per partition.

### Tuning Kafka Consumers

Consumers can create throughput issues on the other side of the pipeline. The maximum number of consumers for a topic is equal to the number of partitions. You need enough partitions to handle all the consumers needed to keep up with the producers.

Consumers in the same consumer group split the partitions among them. Adding more consumers to a group can enhance performance. Adding more consumer groups does not affect performance.

How you use the `replica.high.watermark.checkpoint.interval.ms` property can affect throughput. When reading from a partition, you can mark the last point where you read information. That way, if you have to go back and locate missing data, you have a checkpoint from which to move forward without having to reread prior data. If you set the checkpoint watermark for every event, you will never lose a message, but it significantly impacts performance. If, instead, you set it to check the offset every hundred messages, you have a margin of safety with much less impact on throughput.

## Configuring JMX Ephemeral Ports

Kafka uses two high-numbered [ephemeral ports](#) for JMX. These ports are listed when you view `netstat -anp` information for the Kafka Broker process.

You can change the number for the first port by adding a command similar to `-Dcom.sun.management.jmxremote.rmi.port=<port number>` to the field **Additional Broker Java Options (broker\_java\_opts)** in Cloudera Manager. The `JMX_PORT` configuration maps to `com.sun.management.jmxremote.port` by default.

The second ephemeral port used for JMX communication is implemented for the JRMP protocol and cannot be changed.

## Quotas

For a quick video introduction to quotas, see [tl;dr: Quotas](#).

In CDK 2.0 and higher Powered By Apache Kafka, Kafka can enforce quotas on produce and fetch requests. Producers and consumers can use very high volumes of data. This can monopolize broker resources, cause network saturation, and generally deny service to other clients and the brokers themselves. *Quotas* protect against these issues and are important for large, multi-tenant clusters where a small set of clients using high volumes of data can degrade the user experience.

Quotas are byte-rate thresholds, defined per client ID. A client ID logically identifies an application making a request. A single client ID can span multiple producer and consumer instances. The quota is applied for all instances as a single entity: For example, if a client ID has a produce quota of 10 MB/s, that quota is shared across all instances with that same ID.

When running Kafka as a service, quotas can enforce API limits. By default, each unique client ID receives a fixed quota in bytes per second, as configured by the cluster (`quota.producer.default`, `quota.consumer.default`). This quota is defined on a per-broker basis. Each client can publish or fetch a maximum of *X* bytes per second per broker before it gets throttled.

The broker does not return an error when a client exceeds its quota, but instead attempts to slow the client down. The broker computes the amount of delay needed to bring a client under its quota and delays the response for that amount of time. This approach keeps the quota violation transparent to clients (outside of client-side metrics). This also prevents clients from having to implement special backoff and retry behavior.



## Setting Quotas

You can override the default quota for client IDs that need a higher or lower quota. The mechanism is similar to per-topic log configuration overrides. Write your client ID overrides to ZooKeeper under `/config/clients`. All brokers read the overrides, which are effective immediately. You can change quotas without having to do a rolling restart of the entire cluster.

By default, each client ID receives an unlimited quota. The following configuration sets the default quota per producer and consumer client ID to 10 MB/s.

```
quota.producer.default=10485760
quota.consumer.default=10485760
```

To set quotas using Cloudera Manager, open the Kafka **Configuration** page and search for *Quota*. Use the fields provided to set the **Default Consumer Quota** or **Default Producer Quota**. For more information, see [Modifying Configuration Properties Using Cloudera Manager](#).

## Setting User Limits for Kafka

Kafka opens many files at the same time. The default setting of 1024 for the maximum number of open files on most Unix-like systems is insufficient. Any significant load can result in failures and cause error messages such as `java.io.IOException...(Too many open files)` to be logged in the Kafka or HDFS log files. You might also notice errors such as this:

```
ERROR Error in acceptor (kafka.network.Acceptor)
java.io.IOException: Too many open files
```

Cloudera recommends setting the value to a relatively high starting point, such as 100,000.

You can monitor the number of file descriptors in use on the Kafka Broker dashboard. In Cloudera Manager:

1. Go to the Kafka service.
2. Select a Kafka Broker.
3. Open **Charts Library > Process Resources** and scroll down to the **File Descriptors** chart.

See [http://www.cloudera.com/documentation/enterprise/latest/topics/cm\\_dg\\_view\\_charts.html](http://www.cloudera.com/documentation/enterprise/latest/topics/cm_dg_view_charts.html).

## Viewing Apache Kafka Metrics

For the complete list of Apache Kafka metrics, see:

- [Kafka Metrics](#)
- [Kafka Broker Metrics](#)
- [Kafka Broker Topic Metrics](#)
- [Kafka MirrorMaker Metrics](#)
- [Kafka Replica Metrics](#)

## Working with Apache Kafka Logs

By default, the CDK Powered By Apache Kafka parcel is configured to log all Kafka log messages to one file per host, or broker, in the following location:

```
${log.dir}/kafka-broker-<your_hostname>.log
```

The default log directory is `/var/log/kafka`. You can view, filter, and search the logs using Cloudera Manager. See [Logs](#) for more information about viewing logs in Cloudera Manager.

You can view, filter, and search this log using Cloudera Manager. See [Logs](#).

For debugging purposes, you can create a separate file with `TRACE` level logs of a specific component (such as the controller) or the state changes.

For example, to restore the default Apache Kafka log4j configuration, do the following:

1. Navigate to the [Kafka Broker Configuration](#) page.
2. Search for the **Kafka Broker Logging Advanced Configuration Snippet (Safety Valve)** field.
3. Copy and paste the configuration snippet from the [Apache Kafka log4j.properties file](#).

Alternatively, you can add only the appenders you need.

For more information on setting properties, see [Modifying Configuration Properties Using Cloudera Manager](#).

## Appendix: Apache License, Version 2.0

### SPDX short identifier: Apache-2.0

Apache License  
Version 2.0, January 2004  
<http://www.apache.org/licenses/>

#### TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

##### 1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

##### 2. Grant of Copyright License.

Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

##### 3. Grant of Patent License.

Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims

licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

#### 4. Redistribution.

You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

1. You must give any other recipients of the Work or Derivative Works a copy of this License; and
2. You must cause any modified files to carry prominent notices stating that You changed the files; and
3. You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
4. If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

#### 5. Submission of Contributions.

Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

#### 6. Trademarks.

This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

#### 7. Disclaimer of Warranty.

Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

#### 8. Limitation of Liability.

In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

#### 9. Accepting Warranty or Additional Liability.

While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

#### APPENDIX: How to apply the Apache License to your work

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

```
Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

    http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software
distributed under the License is distributed on an "AS IS" BASIS,
WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.
See the License for the specific language governing permissions and
limitations under the License.
```